



655 ROCK TRENCHER

Features	Advantages	Benefits
Matched to Customers High Flow Skid Steer Loader	One Power Unit On Site /Multiple Attachment	Less Cost; Increased ROI
Trenches Through Asphalt, Frozen Ground/Fracturable Rock and Compacted Soils	Productivity In Tough Digging Conditions	Increased ROI
Digging Depth 30 Inches Deep and 8 Inches Wide	Matched To Many Requirements for Utility Trenching	Versatility for Many Requirements; Increased ROI





655 Rock Trencher

- Mount to skid-steer loaders
- Designed for trenching fracturable rock, asphalt and compacted ground
- Heavy duty crumpler & safety bar
- High flow
- 30" boom and 8" cutting width
- Tooth every station rock chain
- 1 year limited warranty

Specifications	655 Trencher 30" Boom
Trench depth with auger at 65° digging angle	30"
Chain widths	8"
Recommended trenching angle	65°
Headshaft height	11.25"
Length (overall)	58"
Width (overall)	43"
Height (overall)	37"
Spoil discharge reach	27"
Hydrostatic Motor	35 cu. in. displacement
Hydraulic System	
GPM requirements	min 22 / max 40
Max operating pressure psi	3500

655 ROCK TRENCHER

- 2" pitch, 43,000 lb. anti-back flex chain for maximum performance and life.
- Double standard chain for tooth pattern versatility.
- Heavy-duty boom & crumber with replaceable wear strips
- Heavy duty chain reduction drive system amplifies torque to cutting chain.
- High torque hydraulic motor for maximum digging power.
- Low profile dirt shield for better operator visibility
- Built-in skid shoe to provide positive depth control for auger.
- Pivoting crumber shoe to assist with loose soil removal.
- 1 year limited warranty

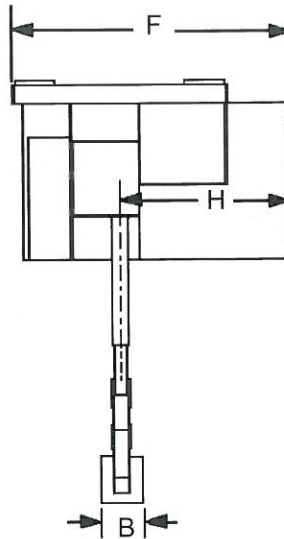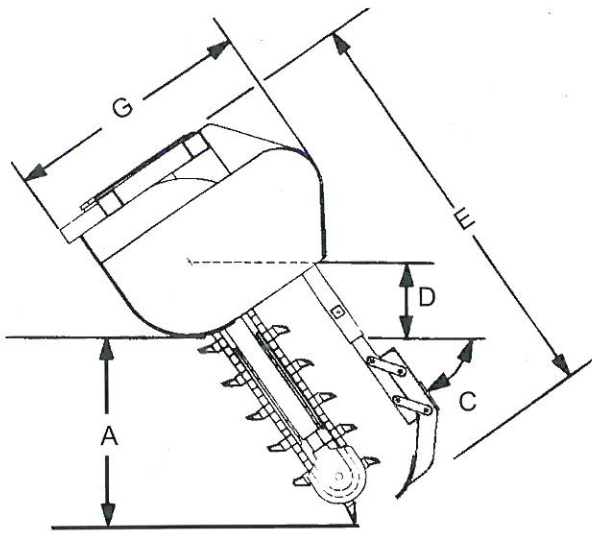

Subject to change without notice.