





Agricultural Attachments

BRADCO®
The MAJOR®

Get Attached®



Agricultural Grapple (skid-steer loaders)







FEATURES & BENEFITS

- designed to pick-up & transfer ag materials
- excellent visibility through grapple
- 3" & 7" tine spacing option
- geometric tooth design draws material into bucket
- protection for cylinder
- full open stop strength & diagonal loading support
- pivot pins have lubrication capabilities
- replaceable hooks
- 2-year warranty on Bradco®

SPECIFICATIONS

A	grapple closed	27"
B	grapple open	42"
C	overall depth	39"
D	bucket width	66" & 74"
E	overall length	39"
F	grapple width	60"
G	tine spacing distance	3" or 7"
	total weight	587 lb
	clamping force	1850 lb
	dampened piston cylinder	

Hay Grapple Bucket (for telehandlers, tractor loaders, wheel loaders)

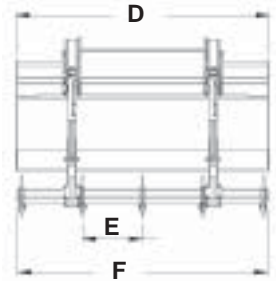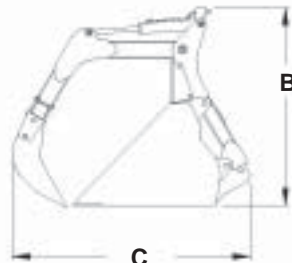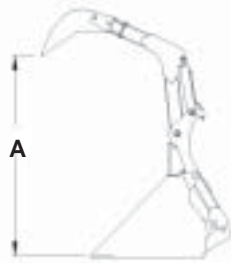



FEATURES & BENEFITS

- optional grapple with spill screen
- single auxiliary hydraulic circuit
- optional bolt-on cutting edge
- 1.75 yd bucket, 96" width
- dual load checked cylinders
- replaceable hooks
- 1-year warranty

SPECIFICATIONS

A	grapple opening	73"
B	overall height	57"
C	overall depth (may vary)	68"
D	bucket width	96"
E	tine spacing	22"
F	overall grapple width	95"

Manure Fork & Grab (for telehandlers, tractor loaders, wheel loaders)

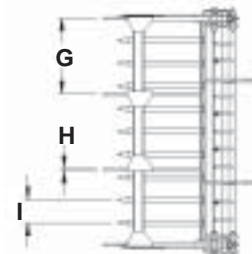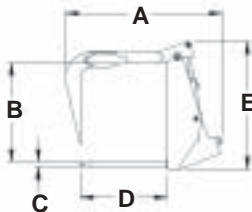


FEATURES & BENEFITS

- single auxiliary hydraulic circuit
- dual cylinders
- replaceable hooks
- 1-year warranty

SPECIFICATIONS

A	overall depth	61"
B	effective inside height	39"
C	tine diameter	2"
D	length of tine	34"
F	overall width	72", 90", & 96"
G	reference grapple spacing	30"
H	reference grapple diameter	75"
I	tine spacing	9"
E	overall height	50"

Bale fork (for telehandlers)






FEATURES & BENEFITS

- flat-eight fork
- replaceable hooks
- hooks made with high strength T-1 abrasion-resistant steel
- handles 8 small square bales, flat or on sides
- picks-up bales in a tight formation for easy handling
- 1-year warranty available

SPECIFICATIONS

- A overall length without mount 81"
- B. profile height 29"
- C. tine spacing 13"
- D. tine spacing 6.5"
- E. overall width 78"
4.5" hook depth

Bale Grab (for telehandlers)

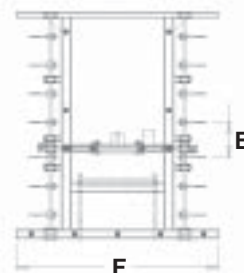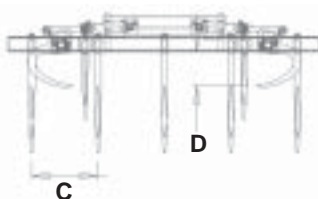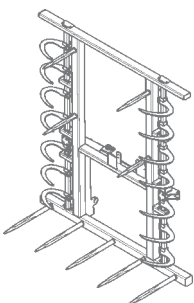




FEATURES & BENEFITS

- handles three 3' bales or two 4' bales
- 85" wide by 96" high
- hooks made with high strength T-1 abrasion-resistant steel
- single auxiliary hydraulic circuit
- replaceable hooks & tines
- forged straight spear tines
- 1-year warranty

SPECIFICATIONS

- A overall height 96"
- B. large tine length 28"
- C. large tine spacing 18"
- D. hook depth 9.5"
- E. hook spacing 15"
- F. overall width 84.75"

Bale Hugger (for skid-steer & telehandlers)

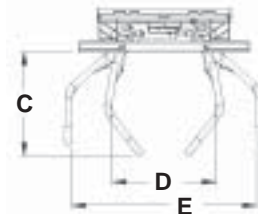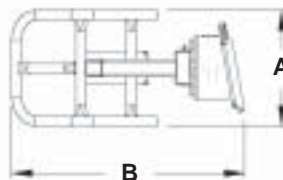


FEATURES & BENEFITS

- 5-1/2 ft opening arms hold hay & round bales easily
- tubular construction gives added strength & eliminates damage to wrapped bales
- exclusive dual pilot operated hydraulic check valve for positive non-slip grip
- fully assembled including hydraulic hoses & ISO flat-face hydraulic couplers
- universal skid-steer loader quick attach mounting
- high pressure hydraulic cylinder to with stand skid-steer loader hydraulic systems
- 2-year warranty on Bradco®

SPECIFICATIONS

- A. arm height 29"
- B. overall length (SSL) 57"
will vary with telehandler
- C. arm reach 40"
- D. closed width 37"
- E. open width 66"

Bale Squeeze (for telehandlers)

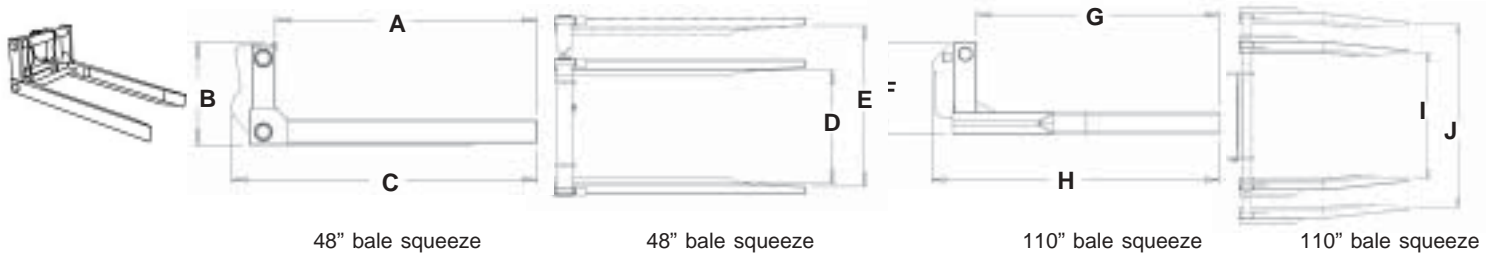

48" bale squeeze

48" bale squeeze

110" bale squeeze

110" bale squeeze

FEATURES & BENEFITS

- 48" & 110" sizes
- single auxiliary hydraulic circuit
- load check for positive holding lock
- two long arms with unique design to allow full contact with object
- fully welded round tube design
- 1-year warranty

SPECIFICATIONS


48" bale squeeze

A. tine length	88"
B. overall height	35"
C. overall length (may vary) .	103"
D. squeezed width	43"
E. clamp open	60"

110" bale squeeze

F. overall height	33"
G. tine length	88"
H. overall length may vary	103"
I. squeezed width	70"
J. clamp open	107"

Bale Spike (for skid-steers & telehandlers)

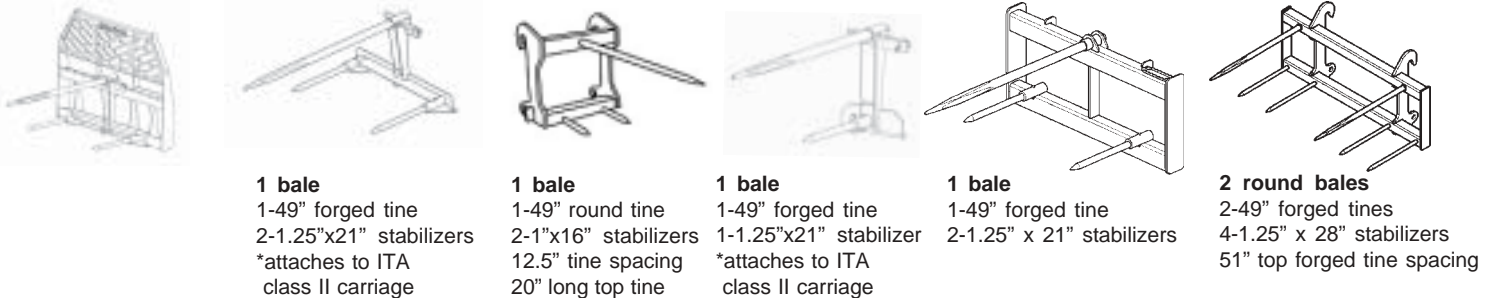

1 bale

- 1-49" forged tine
- 2-1.25"x21" stabilizers
- *attaches to ITA class II carriage

1 bale

- 1-49" round tine
- 2-1"x16" stabilizers
- 12.5" tine spacing
- 20" long top tine

1 bale

- 1-49" forged tine
- 1-1.25"x21" stabilizer
- *attaches to ITA class II carriage

1 bale


- 1-49" forged tine
- 2-1.25" x 21" stabilizers

2 round bales

- 2-49" forged tines
- 4-1.25" x 28" stabilizers
- 51" top forged tine spacing


FEATURES & BENEFITS

- various mountings available
- easily replaceable tines
- models available for one and two round bales or one & two large square bales
- 2-year warranty available on Bradco®



large square bale

- 2-49" forged tines
- 2-1.25" x 28" stabilizers
- 64" top forged tine spacing



bale carriage

- 4-2.25" x 60" tines
- 22" tine spacing

Silage Defacer (for skid-steer & telehandlers)



FEATURES & BENEFITS

- converging auger with helix pick design cutter loosens haylage & silage from tightly compacted bunkers
- maintains smooth, compacted bunker face for reduced spoil & improved palatability
- doesn't reduce haylage stem length for optimum digestibility yielding higher milk production
- open design allows operator to see bunker face & remain clog free
- adjustable guides for depth of cut
- 96" full width cut allows defacer to cut next to walls & straight through to back of bunker
- cutter made from abrasion resist & high strength material for long life
- 80# chain drive with quick-n-easy chain tension adjustment (ratchet cam)
- working height from 0-19 ft depending skid-steer loader lift height
- 2-year warranty on Bradco®

SPECIFICATIONS

A. fixed depth	0-3"
B. skid-leader reach	10"
telehandler reach ...	4'-6"
C. overall length	8"

Bradco / McMillen / The Major · P.O. Box 266 · Delhi, Iowa 52223 USA

563 922 2981 · 800 922 2981 · Fax 563 922 2700

www.attachment.com