



SHAFTS SCREENER MB-HDS212

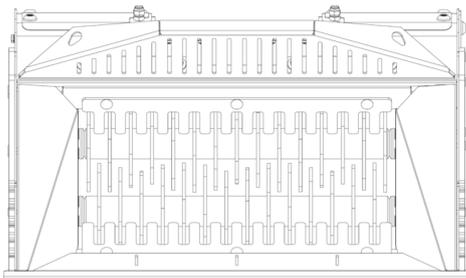

A

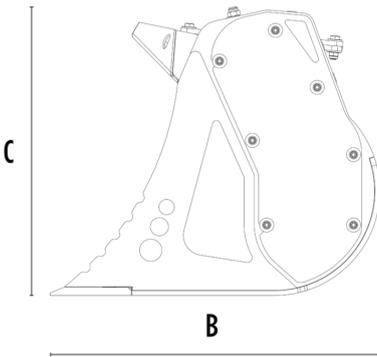

B



SPECIFICATIONS

	Recommended excavator	lb	11,020 - 22,050
	Recommended backhoe loader	lb	17,640 - 19,840*
	Recommended skid steer loader**	lb	6,610 - 8,820
	Weight	lb	1,058
	Load capacity	cy	0.2
	Pressure	PSI	2,901 - 3,626
	Back pressure	PSI	< 290
	Oil flow rate***	gal/min	20 - 26
	Size A	in	48
	Size B	in	32
	Size C	in	28

* Only compatible with the posterior boom of a Backhoe.

** Please verify machine's Rated Operating Capacity.

*** The minimum hydraulic flow rate value must be alongside the required operating pressure.

SHAFT KIT

KIT	APPLICATION
 RQ8 Sifting kit RQ20 Sifting kit RQ50 Sifting kit	Sifting damp/dry soil Soil Aeration
 RM Mixer kit	Coal reduction Soil Aeration Compost Aeration Glass reduction Drywall reduction
 RE8 Fine sifting kit RE16 Fine sifting kit	Sifting damp/dry soil
 RC Compost kit	Shredding foliage and small branches Composting

OPTIONAL ACCESSORIES

Shaft holder

24 Month Warranty

APPLICATION AREAS



Road works



Tunnels



Enclosed spaces



Pipelines



Inert material recycling



Excavations



Urban construction sites



Foundries



Maintaining landscape and agricultural areas