

Sanding Auger Bucket




Works With

- Salt
- Sand
- Fertilizer
- Concrete (Up to 1" Slump)
- Feed
- Grains
- Gravel (3/4" Max)

- Skid-steer quick attach on both sides allows for left and right hand discharge.
- Patented replaceable rubber flighted steel auger prevents coarse material from binding.
- Includes weld-on cutting edge for easy loading without having to leave the machine or switch attachments.
- Spinner assembly can easily be removed to allow dispensing of concrete and other materials.
- Hydraulic direct drive.
- Includes two multi-linked chutes (24" and 36"), hoses, and couplers.
- Auger speed is adjustable.
- 1 Year warranty.



Sanding Auger Bucket Specifications

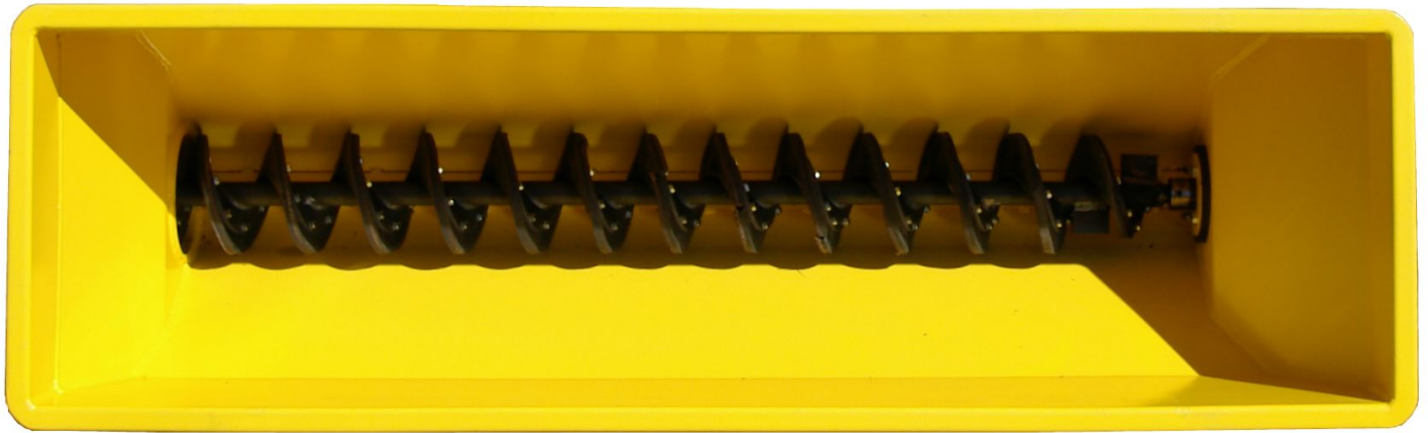

Model	3120S
Length	80"
Width	23"
Height	33"
Weight	460 lbs.
Volume	13 cu. ft.
Min. Hyd. Requirements	12 GPM
Auger Length	61.5"
Auger Diameter – Without Rubber	4.0"
Auger Diameter – With Rubber	6.5"
Flighting Spacing	4.0"
Spinner Diameter	12.0"