
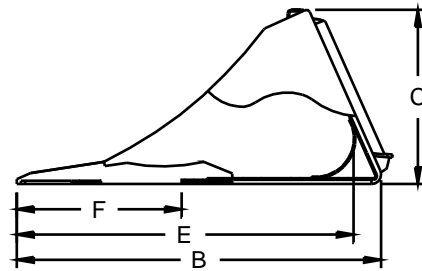


VIRNIG

Skeleton Rock/Dirt Bucket Specifications

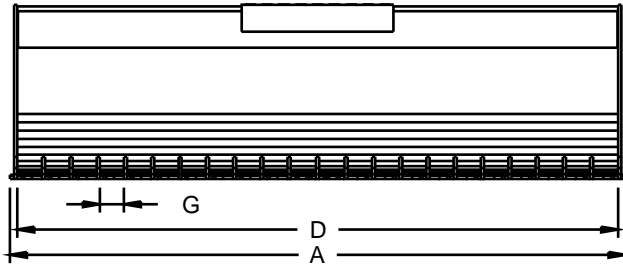

MODEL	DSRV60	DSRV66	DSRV72	DSRV78	DSRV84
A) Overall Bucket Width (Inches)	61.0	67.0	73.0	79.0	85.0
B) Bucket Depth (Inches)	43.2				
C) Bucket Height (Inches)	20.8				
D) Inside Bucket Width (Inches)	59.3	65.3	71.3	77.3	83.3
E) Inside Bucket Depth (Inches)	40.0				
F) Tine Length (Inches)	19.5				
Struck Capacity, Solid Floor Portion (Cubic Feet)	7.5	8.3	9.1	9.8	10.6
Heaped Capacity, Solid Floor Portion (Cubic Feet)	9.0	10.0	10.9	11.8	12.7
Number of Tines (With Sides)	19	21	23	25	27
G) Space Between Tines (Inches)	2.9	2.9	2.9	2.9	2.8
Approximate Weight (Pounds)	550	590	630	680	720

- Recommended for loaders with operating capacities greater than 1500 pounds.
- 3/8" grade 80 gusseted plate tines, 80,000 psi minimum yield strength.

Specifications and designs are subject to change without notice.

Virnig Manufacturing Inc.
800-648-2408
www.virnigmfg.com