


# HYDRAULIC ADJUST PALLET FORK

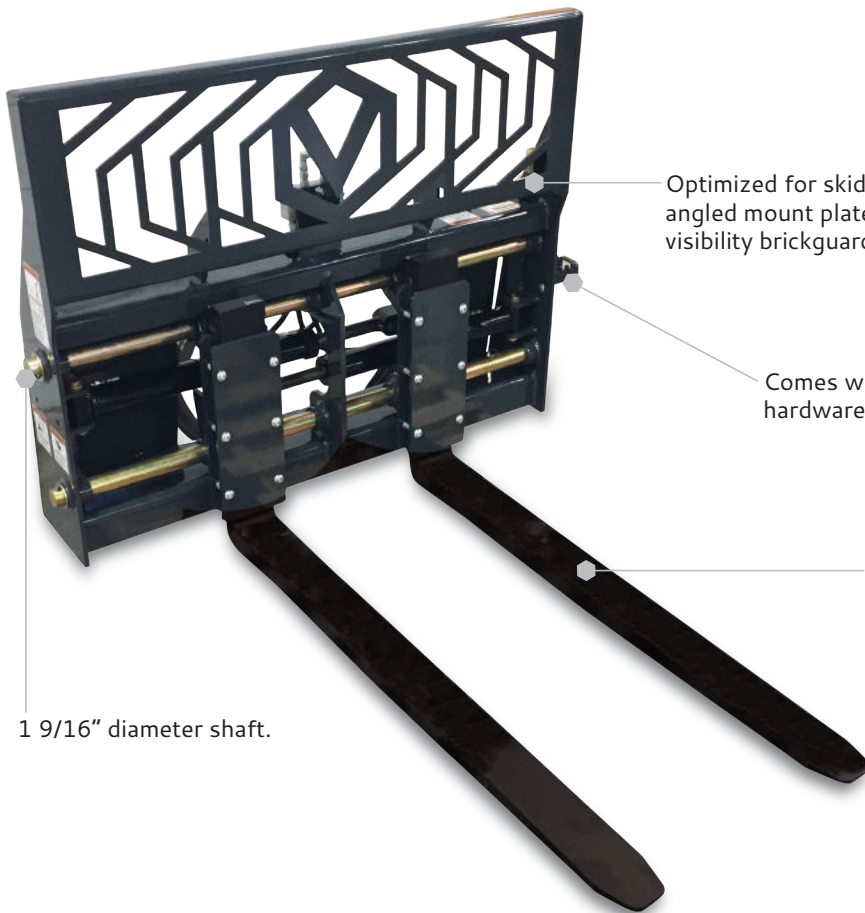

Optimized for skid loader use with angled mount plate and high visibility brickguard.

Comes with one step and hardware to install on either side.



Standard ITA Class II forged tines rated at 5,500 lbs per pair.

1 9/16" diameter shaft.



Adjust the tines simultaneously from 8" to 38" wide without leaving the cab.

# HYDRAULIC ADJUST PALLET FORK SPECS

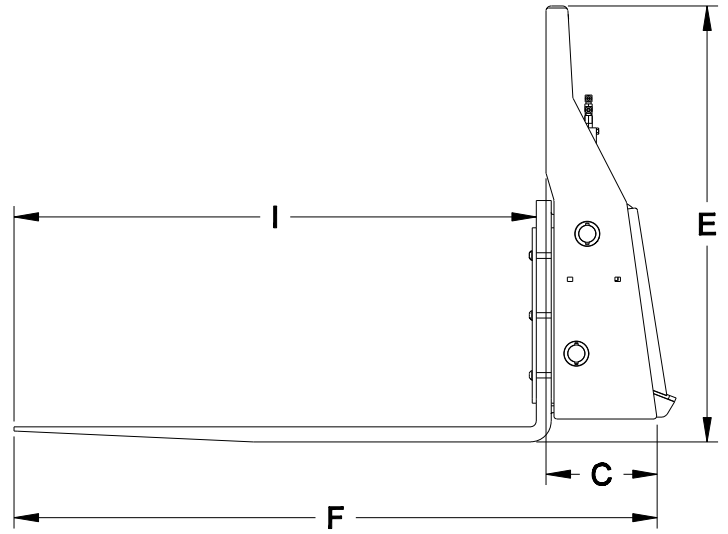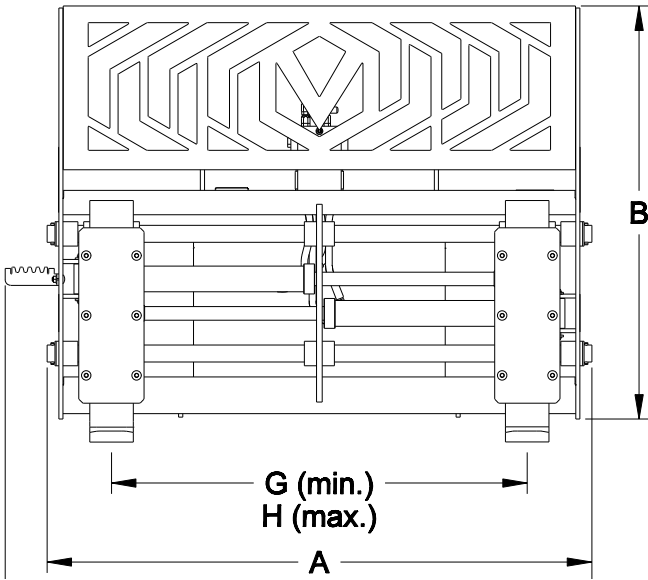

MODEL	PFHA48T <sup>1</sup> / PFHA48TG <sup>2</sup>
(A) Frame Width (Inches)	50.1
(B) Frame Height (Inches)	38.0
(C) Frame Depth (Inches)	10.2
(D) Overall Width (Inches)	53.9
(E) Overall Height (Inches)	40.1
(F) Overall Depth (Inches)	59.1
(G) Minimum Tine Space (Inches)	7.8
(H) Maximum Tine Space (Inches)	38.2
(I) Tine Length (Inches)	48.0
Tine Thickness (Inches)	1.5
Approximate Weight (Pounds)	705
Capacity (Pounds)	5500
Recommended Loader Capacity	Greater than 1500 pounds

<sup>1</sup>USA Made Tines.

<sup>2</sup>Globally Sourced Tines.