

BROOMS

PICK-UP BROOM – INTERNAL WATER TANK

Available widths 72" & 84"

Patent pending internal water tank design with industry leading capacity to control dust without compromise.



EAT•N
Char-Lynn

Standard with 26" diameter poly/wire wafers; all poly wafers also available. Call for pricing & availability.

15-25 GPM
RECOMMENDED FLOW RATE



DIRECT DRIVE MOTOR
WITH RELIEF VALVE PROTECTION

GREATER THAN
2000 LB
LOADER OPERATING CAPACITY



GUTTER BRUSH



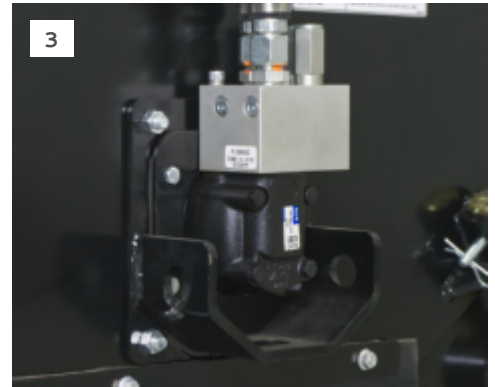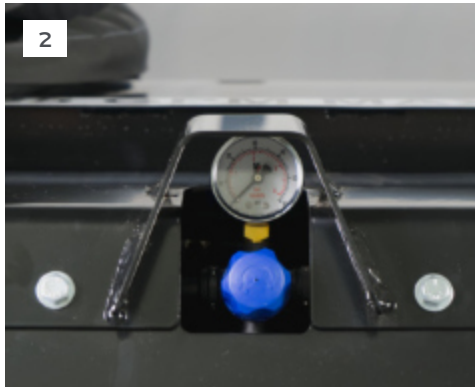

1. 55-GALLON INTERNAL WATER TANK W/CAPACITY INDICATORS PROVIDES 35 MINUTES OF CONTINUOUS RUNTIME

2. ADJUSTABLE VALVE REGULATES WATER PRESSURE

3. RECESSED & GUARDED MOTOR

4. HD BUCKET WITH WEAR BARS & BOLT-ON EDGE

5. OVERSIZED 2" GREASEABLE BEARING

6. PIN ADJUSTMENT SYSTEM TO QUICKLY SET BRISTLE HEIGHT

7. REPLACE WAFERS EASILY WITHOUT DISCONNECTING HOSES. STANDARD WITH POLY/WIRE WAFERS

MODEL	PBW172	PBW184
Sweeping Width (Inches)	72.0	84.0
Overall Width (Inches)	79.3	91.3
Overall Height (Inches)	31.3	
Overall Depth (Inches)	73.0	
Number of 26 Inch Diameter Wafers	35	41
Recommended Flow Rate (GPM)	15-25 Standard Flow Only	
Approximate Weight (Pounds)	1330	1465
Recommended Loader Capacity	Greater than 2000 pounds	