

V50 ROOT RAKE GRAPPLE



40" grapple jaw opening.


3/8" Grade 80 steel jaw tines.

3/8" Grade 80 steel rake tines.

NitroSteel® cylinder rods and Teflon® coated bushings on all pivots.



Series 23 replaceable cast teeth.





Cylinder Guards standard.

Known clearance issue with URG66 & URG72 on Takeuchi® track loaders and John Deere® G-Series loaders (330G, 331G, 332G, and 333G).



Two-cylinder, single jaw grapple for digging, raking, piling and loading debris.

V50 ROOT RAKE GRAPPLE SPECS

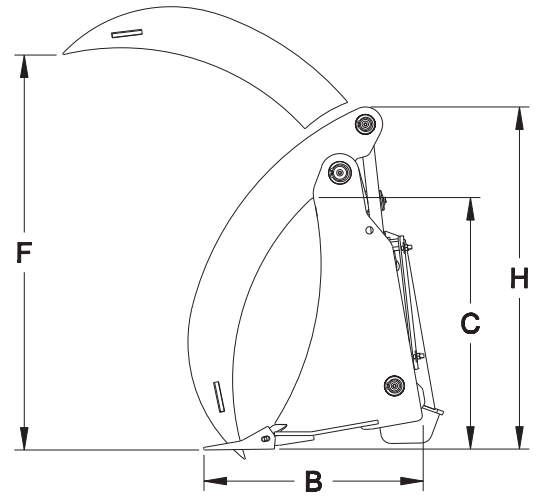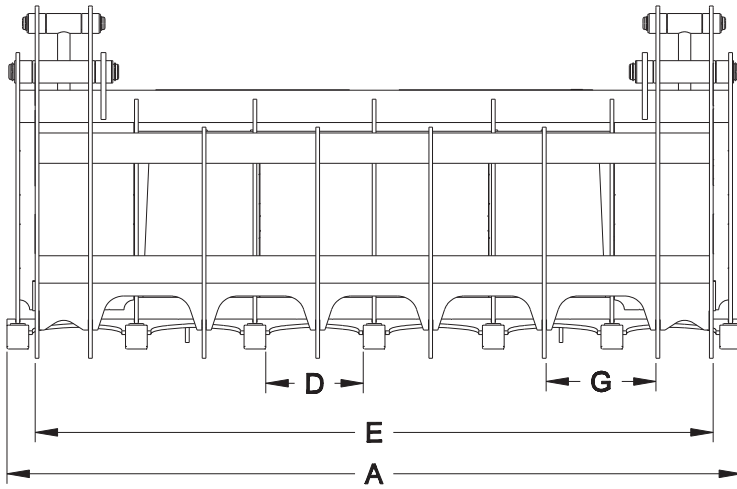

MODEL	URG66	URG72	URG78
(A) Overall Bucket Width (Inches)	67.9	73.9	79.9
(B) Bucket Depth (Inches)	22.1		
(C) Bucket Height (Inches)	25.3		
Number of Teeth	6	7	8
(D) Space Between Teeth, Bucket (Inches)	10.9	9.8	8.9
(E) Overall Grapple Width (Inches)	62.3	68.3	74.3
(F) Grapple Jaw Opening (Inches)	40.0		
Grapple Jaw Thickness (Inches)	0.375*		
Rake Tine Thickness (Inches)	0.375*		
(G) Space Between Tines, Grapple Jaws (Inches)	8.8	11.1	10.1
(H) Height with Grapple Closed (Inches)	34.4		
Cylinder Bore / Stroke (Inches)	2.0 / 8.375		
Cylinder Pins / Hinge Pins Diameter (Inches)	1.25 / 1.563		
Approximate Weight (Pounds)	790	845	905
Recommended Loader Capacity	Less than 2400 pounds		

*Material is Grade 80 Plate (80,000 PSI Minimum Yield Strength).