

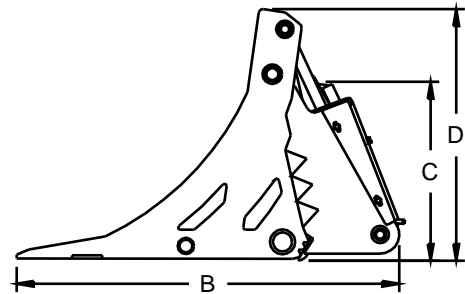


# VIRNIG

## Skeleton Multi-Purpose Bucket Specifications

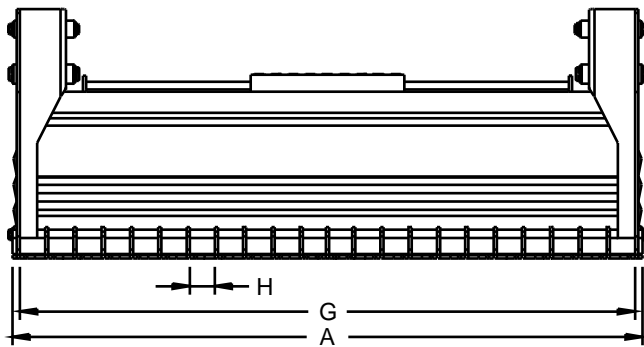

MODEL	SMPV66	SMPV72	SMPV78	SMPV84
A) Overall Bucket Width (Inches)	67.8	73.8	79.8	85.8
B) Bucket Depth (Inches)	44.8			
C) Bucket Height (Inches)	21.3			
D) Overall Height, Closed (Inches)	29.8			
E) Overall Height, Open (Inches)	54.5			
F) Clam Opening (Inches)	31.0			
G) Dozer Width (Inches)	65.9	71.9	77.9	83.9
Number of Tines (With Sides)	21	23	25	27
H) Space Between Tines (Inches)	2.9			
Approximate Weight (Pounds)	1010	1060	1115	1165

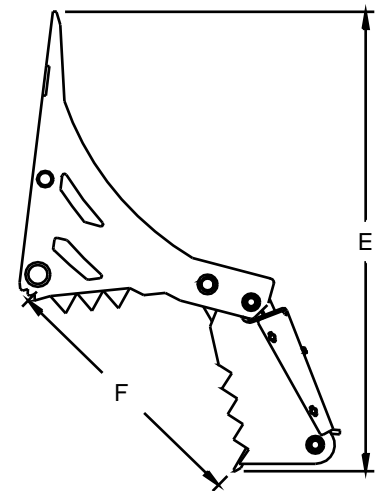

- Recommended for loaders with operating capacities greater than 1500 pounds.
- 3/8" grade 80 reinforced plate tines, 80,000 psi minimum yield strength.
- 5/8" X 6" bolt on edge on front of dozer, 1 9/16" diameter hinge pins.
- 2" bore, 8 3/8" stroke cylinders with 1 1/4" rods and 1 1/4" cylinder pins.
- Hoses from bucket to loader and couplers are included.
- Cylinder Guards standard.

Specifications and designs are subject to change without notice.

Virnig Manufacturing Inc.  
800-648-2408  
www.virnigmg.com