

BRUSH CUTTERS

V20 MINI SKID OPEN FRONT ROTARY BRUSH CUTTER

Available widths 42" & 48"

Cuts up to 3" diameter trees and exposed blades allow faster cutting for a maintained finish.



EATON

Char-Lynn

CHOOSE MINI SKID MOUNT:
TORO®/MINI UNIVERSAL, BOBCAT®, and ASV® (CBC42 not compatible). Universal skid steer quick tach mount not available.

Cutters include couplers and 3/4" diameter Eaton® hoses.

Always wear proper PPE (Personal Protective Equipment). If operating in cab enclosure do not operate without a shatterproof cab.

3.0"
CUT CAPACITY

42" & 48"
CUT WIDTHS

11-18 GPM
ONE MOTOR OPTION
STANDARD FLOW ONLY


UP TO 150LB
FLYWHEEL
WEIGHT

UP TO 690LB
OVERALL WEIGHT

DETAIL UNDER DECK



BRUSH CUTTERS

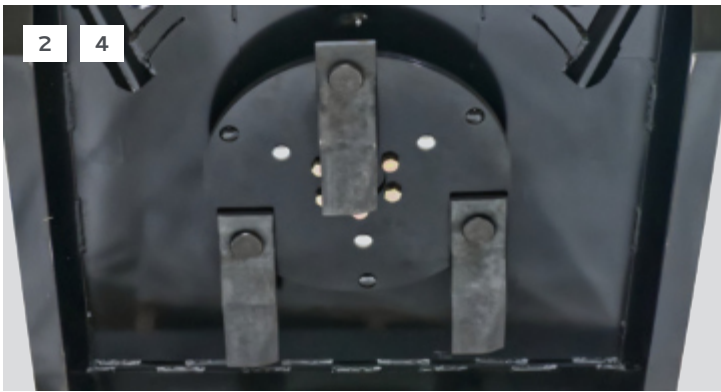

1. DIRECT DRIVE EATON® MOTOR WITH RELIEF VALVES

2. HYDRAULIC BRAKING STOPS FLYWHEEL IN LESS THAN 10 SECONDS

3. STANDARD MOTOR GUARD & SPINDLE GUARD

4. CIRCULAR FLYWHEEL WITH 3 UPDRAFT BLADES BOUNCES OFF STUMPS

MODEL	CBC42-O	CBC48-O
Cut Width (Inches)	42.0	48.0
Overall Width (Inches)	47.0	53.0
Overall Height (Inches)		20.5
Overall Depth (Inches)	51.3	57.3
Deck Height (Inches)		6.5
Minimum Cut Height (Inches)		2.0
Cutting Capacity, Diameter (Inches)		3.0
Deck Thickness: Top / Side (Inches)		0.19 / 0.19*
Recommended Flow Rate (GPM)		11 - 18
Approximate Weight with Mini Universal Mount (Pounds)	590**	690**
Recommended Loader Capacity		Greater than 590 pounds

*Material is Grade 50 Plate (50,000 PSI Minimum Yield Strength).

**ASV mount adds approximately 40 pounds and Bobcat mount adds 35 pounds to model weight.