

V20 MINI SKID STEER POWER RAKE

Available widths 48", 60"

Grade soil and gravel, prepare seedbeds and remove debris.



Shown with optional Hydraulic Angle



CHOOSE MINI SKID MOUNT:

- TORO®/MINI UNIVERSAL
- BOBCAT®
- ASV®
- Universal skid steer quick tach mount not available.

Standard with manual angle.


10-18 GPM
RECOMMENDED
FLOW RATE

**DIRECT DRIVE
MOTOR**

**MANUAL &
HYDRAULIC**
ANGLE AVAILABLE

GREATER THAN
515 LB
LOADER OPERATING CAPACITY

1. BI-DIRECTIONAL OPERATION IN FORWARD OR REVERSE
2. REVERSIBLE & REMOVEABLE END PLATES
3. ANGLE THE RAKE 25° LEFT OR RIGHT
4. GUARDED MOTOR
5. FLOATING DESIGN FOR A SMOOTH FINISH & PROVIDES FULL DOWN PRESSURE CAPABILITY
6. CARBIDE TIP TEETH
7. FLAT-FREE URETHANE FILLED TIRES FOR EASY MAINTENANCE

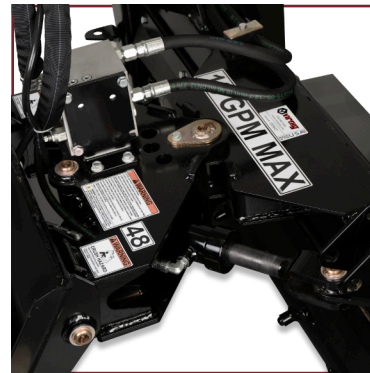

**OPTION:
HYDRAULIC ANGLE**
Angle the rake from the platform or in cab. One-cylinder design using an electric control valve.

MODEL	CPR48	CPR60
Raking Width (Inches)	48.0	60.0
Raking Width at Full Angle (Inches)	44.0	54.2
Overall Width (Inches)	56.0	68.0
Overall Height (Inches)		22.2
Overall Depth (Inches)		52.6
Drum Diameter (Inches)		7.0
Number of Teeth	62	78
Float Link Angle (Degrees)		22
Max Rake Angle (Degrees)		25
Recommended Flow Rate (GPM)	10-18 Standard Flow Only	
Approximate Weight (Pounds)	520 ¹	565 ¹
Recommended Loader Capacity	Greater than 515 pounds	

¹ASV® mount adds approximately 30 pounds and Bobcat® mount adds 25 pounds to model weight.