



V40 UTILITY FORK GRAPPLE

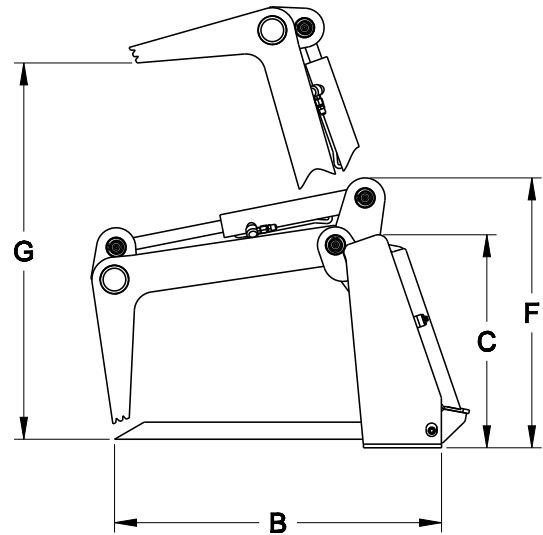

- One-cylinder grapple designed to handle a variety of materials including manure, brush, and debris.
- High tensile strength removable, replaceable 1 3/4" diameter tines.
- No cross member at tine tips allowing better material penetration.
- 2" bore, 8 3/8" stroke cylinder featuring corrosion, dent and flake resistant NitroSteel® cylinder rod.
- Greasable 1 1/4" diameter cylinder and hinge pins.
- Teflon® coated bushings provide lubrication at jaw hinge.

V40 UTILITY FORK GRAPPLE SPECS

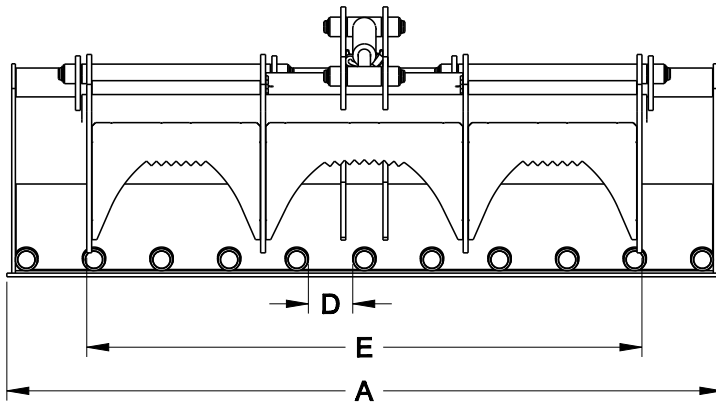

MODEL	MGV160	MVG166	MVG172	MVG178
(A) Overall Bucket Width (Inches)	61.3	67.3	73.3	79.3
(B) Bucket Depth (Inches)	33.5			
(C) Bucket Height (Inches)	21.5			
Number of Tines	9	10	11	12
(D) Space Between Tines (Inches)	5.4	5.3	5.2	5.1
Tine Diameter (Inches)	1.75*			
(E) Overall Grapple Width (Inches)	56.9			
(F) Height with Grapple Closed (Inches)	27.6			
(G) Grapple Jaw Opening (Inches)	38.0			
Approximate Weight (Pounds)	835	860	950	990
Recommended Loader Capacity	Less than 2400 pounds			

*Tine Material is 1045 CFSR Round (100,000 PSI Minimum Yield Strength).

- 1-1/4" diameter hinge pins.
- 1/2" Grade 50 reinforced plate grapple jaw tines (50,000 PSI minimum yield strength).
- 2" bore, 8-3/8" stroke cylinders with 1-1/4" NitroSteel® cylinder rods and 1-1/4" cylinder pins.
- Hoses from grapple to loader and couplers included.