


V40 UTILITY FORK



- Tines easily penetrate piles and low profile allows excellent visibility.
- 1 3/4" diameter, 1045 CFSR tines require no maintenance and are removable for easy replacement.

V40 UTILITY FORK SPECS

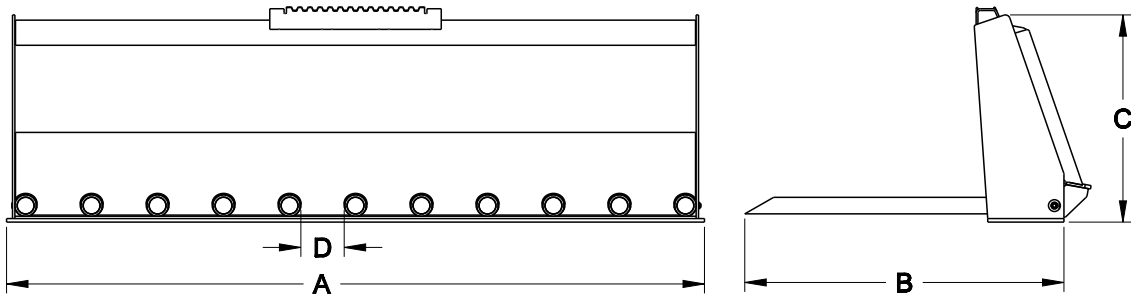

MODEL	MV60	MV66	MV72	MV78
(A) Overall Bucket Width (Inches)	61.3	67.3	73.3	79.3
(B) Bucket Depth (Inches)	33.5			
(C) Bucket Height (Inches)	21.5			
Number of Teeth	9	10	11	12
(D) Space Between Teeth (Inches)	5.4	5.3	5.2	5.1
Tooth Diameter (Inches)	1.75*			
Approximate Weight (Pounds)	545	570	655	695
Recommended Loader Capacity (Pounds)	Less than 2400			

*Tooth Material is 1045 Cold Finished Stress Relieved (CFSR) Round Stock (100,000 PSI Minimum Yield Strength).

- Utility Fork also available with 1 cylinder grapple.