

V40 CLOSED FRONT ROTARY BRUSH CUTTER

Available Widths 60", 66", 72" & 78"

Entry-level in name only, this robust brush cutter stands up in rental fleets, outperforms competitors and leaves a superior finish.




FATON



Char-Lynn

Do not operate rotary brush cutter without a shatterproof cab on loader.

<p>3.0" CUT CAPACITY</p>	<p>60"-78" FOUR CUT WIDTHS</p>	<p>14-32 GPM FOUR MOTOR OPTIONS STANDARD & HIGH FLOW</p>	<p>3500 PSI MAX OPERATING PRESSURE</p>	<p>ANGLED REAR DECK CORNERS NO ROLLER OR CASTER OPTION</p>
---	---	---	---	--

DETAIL UNDER DECK

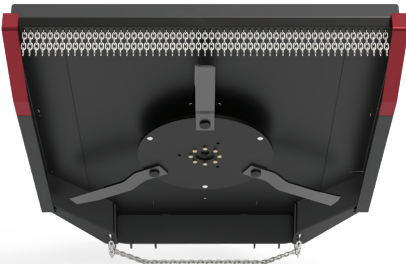

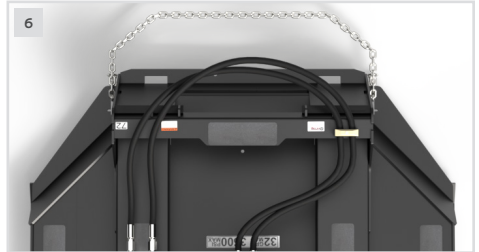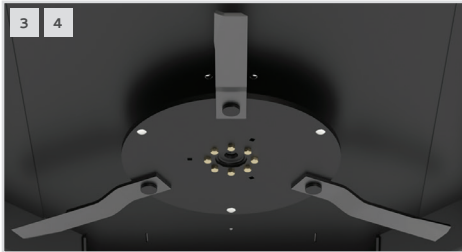

- 1. DIRECT DRIVE EATON® MOTOR WITH PRESSURE RELIEF, MOTOR & SPINDLE GUARDS PREVENT DOWNTIME
- 2. HYDRAULIC BRAKING STOPS FLYWHEEL WITHIN 10 SECONDS, CHAIN CURTAIN HELPS CONTAIN FLYING DEBRIS & LIFT LIMIT CHAIN PROTECTS OPERATOR
- 3. ROUND FLYWHEEL TO GLANCE OFF OBJECTS & ENSURE UNIFORM ENERGY DISTRIBUTION TO EXTEND DRIVETRAIN LIFE
- 4. 3 UPDRAFT MACHINE SHARPENED BLADES WITH 60% LONGER EDGE THAN INDUSTRY STANDARD TO PROCESS MATERIAL FOR A SUPERIOR FINISH
- 5. REPLACEABLE FRONT SKID SHOES DESIGNED TO CUT GROUND LEVEL & HELP GLIDE OVER ROUGH TERRAIN
- 6. ANGLED REAR DECK CORNERS IMPROVE MATERIAL FLOW & TAPERED REAR DECK RUNNERS REDUCE GROUND DISTURBANCE

MODEL	BBC60-C	BBC66-C	BBC72-C	BBC78-C
Cut Width (in.)	60.0	66.0	72.0	78.0
Overall Height / Width / Depth (in.)	22.5 / 66.0 / 76.0	22.5 / 72.0 / 82.0	22.5 / 78.0 / 88.0	22.5 / 84.0 / 94.0
Deck Height (in.)	8.5			
Minimum Cut Height (in.)	1.8			
Cutting Capacity, Diameter (in.)	3.0			
Deck Thickness, Top / Side (in.)	0.19 / 0.25			
Recommended Flow Rate (GPM)	14-25 Standard Flow / 26-32 High Flow			
Max Operating Pressure (PSI)	3500			
Flywheel Weight (lbs)	180	215	220	225
Approximate Weight (lbs)	1170 ¹	1285 ¹	1375 ¹	1470 ¹
Recommended Operating Cap (50%)	Less than 4200 pounds			

¹Standard flow weight. High flow models add approximately 40-80 lbs to model weight.