



V40 SNOW/LIGHT MATERIAL BUCKET

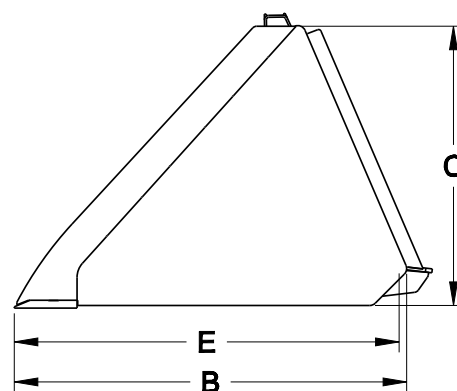


- 3/16" shell and side plates, and 3/8" thick side edges and gussets.
- High-strength, 3/4" x 6" weld-on edge with holes for optional edges (see page 3).
- SLHV96 has two 3/8" thick vertical braces inside the bucket. Similar to the V50 Snow Bucket.

V40 SNOW/LIGHT MATERIAL BUCKET SPECS

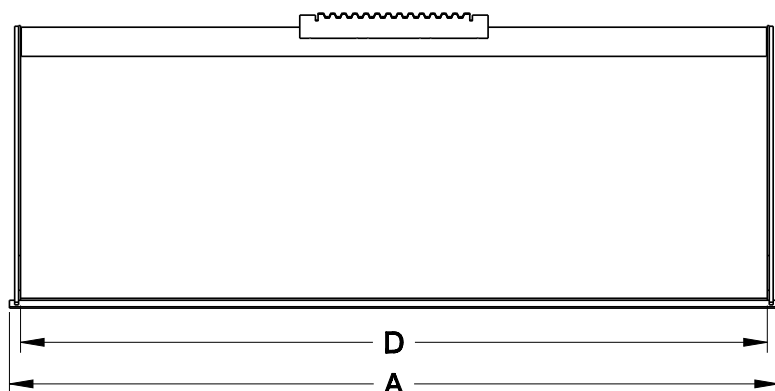


MODEL	SLHV60	SLHV66	SLHV72	SLHV78	SLHV84	SLHV96
(A) Overall Bucket Width (Inches)	61.5	67.5	73.5	79.5	85.5	97.5
(B) Bucket Depth (Inches)	37.6					
(C) Bucket Height (Inches)	26.6					
(D) Inside Bucket Width (Inches)	59.3	65.3	71.3	77.3	83.3	95.3
(E) Inside Bucket Depth (Inches)	36.8					
Struck Capacity (Cubic Feet)	18.6	20.4	22.2	24.0	25.8	29.4
Heaped Capacity (Cubic Feet)	22.3	24.5	26.6	28.8	31.0	35.3
Bucket Back Angle (Degrees)	66					
Shell Thickness (Inches)	0.19					
Side Plate Thickness (Inches)	0.19					
Structural Wear Bars Under Bucket (1/2" x 4")	2	2	2	3	3	4
Approximate Weight (Pounds)	500	535	570	605	640	770
Recommended Loader Capacity	Less than 2400 pounds					

V40 SNOW/LIGHT MATERIAL BUCKET EDGE OPTIONS

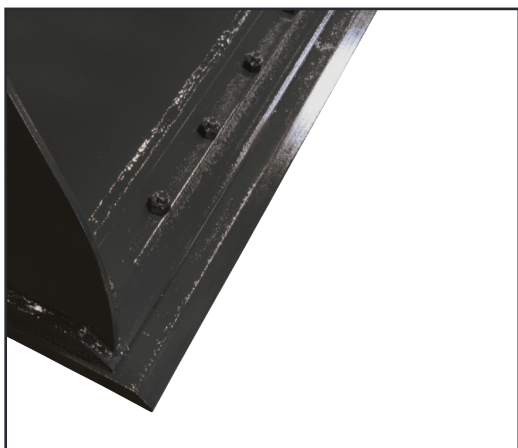

STANDARD BOLT-ON EDGE

- Extends life of bucket edge.
- Reversible 5/8"x8" bolt-on wear edge with 5/8" holes spaced 6" on center.
- Available on all Virnig Buckets except skeleton style.

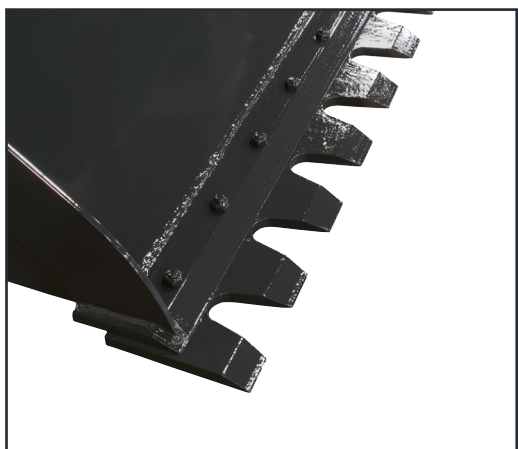

SERRATED BOLT-ON EDGE

- Excellent alternative to toothbar for chiseling and breaking up compacted soil.
- Single bevel, 3/4"x8", serrated bolt-on edge with 5/8" holes spaced 6" on center.
- Available on all Virnig Buckets except skeleton style.