

V40 ROTARY BRUSH CUTTER – STANDARD DECK

Standard dual hydraulic pressure relief valves with dynamic braking stops the 170–220 lb flywheel in under 10 seconds.

Direct drive Eaton® motor rated up to 25 GPM for usage on a wide variety of skid steers.



Bracing along the top connected to a push bar at the front provides rigidity for pushing over thick brush and trees.

Standard replaceable front skid shoes increase the mower deck's wear life.

DETAIL UNDER DECK




Three-blade cutting system, mounted to a large circular flywheel, ensures the flywheel bounces off stumps rather than catching and damaging components.

DO NOT OPERATE ROTARY BRUSH CUTTER WITHOUT A SHATTERPROOF CAB DOOR ON LOADER.



Designed to quickly clear and mulch brush and small trees up to 3" in diameter.

V40 ROTARY BRUSH CUTTER – STANDARD DECK SPECS

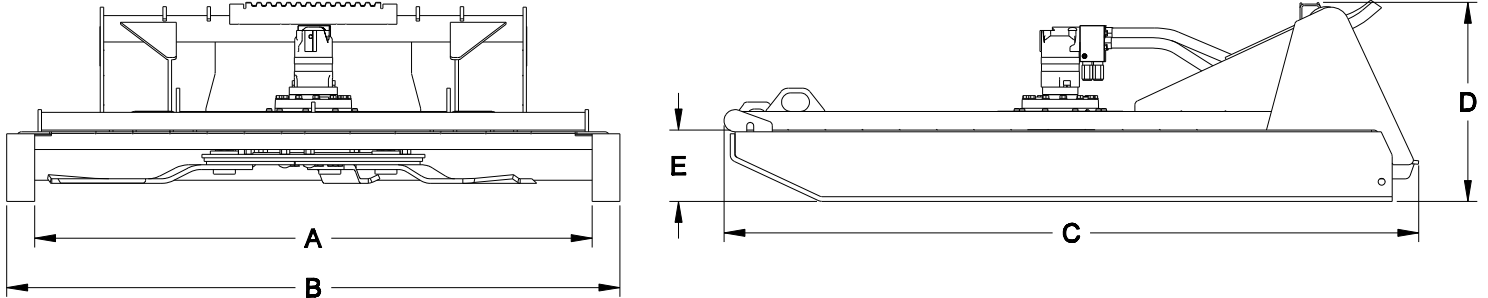

MODEL	BBV60	BBV72
(A) Cut Width (Inches)	60.0	72.0
(B) Overall Cutter Width (Inches)	66.0	78.0
(C) Cutter Depth (Inches)	74.0	86.0
(D) Cutter Height (Inches)	21.4	
(E) Deck Height (Inches)	7.7	
Minimum Cut Height (Inches)	1.9	
Cutting Capacity, Diameter (Inches)	3.0	
Top Deck Thickness (Inches)	0.19*	
Side Deck Thickness (Inches)	0.25*	
Recommended Flow Rate (GPM)	16-25	
Approximate Weight (Pounds)	1075	1300
Recommended Loader Capacity	Greater than 1500 pounds	

*Deck Material is Grade 50 Plate (50,000 Minimum Yield Strength).