

V50 TRENCHER

Maximize your skid steer's productivity with the depth adjustment system, anti-back flex chain, and side shift feature.




Char-Lynn


15-25 GPM
RECOMMENDED
FLOW RATE

DIRECT DRIVE
EATON® MOTOR

GREATER THAN
1500 LB
LOADER OPERATING CAPACITY

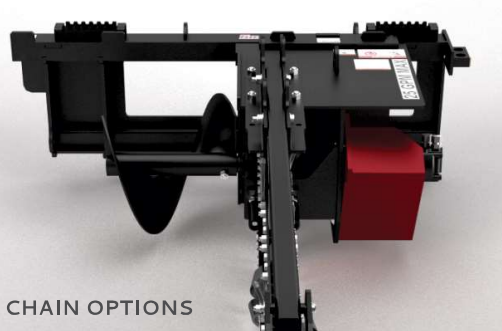


CHAIN OPTIONS



SINGLE STANDARD

Cup tooth every other station. Designed for soft to medium soils. For wet and sticky soils such as wet clay.



DOUBLE STANDARD

Cup tooth every station. Designed for soft to medium soils. For sandy, dry, and loosely-packed soils.




70/30 COMBO

70% shark-style teeth with embedded carbide inserts & 30% cup teeth. For soft to hard soils as well as rocky. Most versatile chain style.




50/50 ROCK & FROST

50% cup teeth, 50% replaceable, rotating carbide rock teeth. For rocky soils and frost.

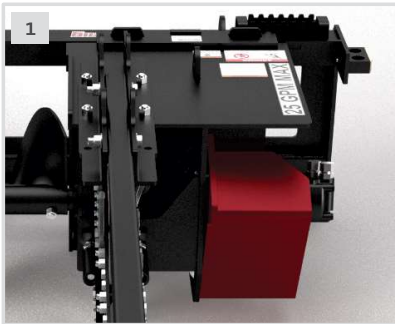

1. 4-POSITION DEPTH ADJUSTMENT SYSTEM ALLOWS OPERATOR TO SET DESIRED TRENCHING DEPTH

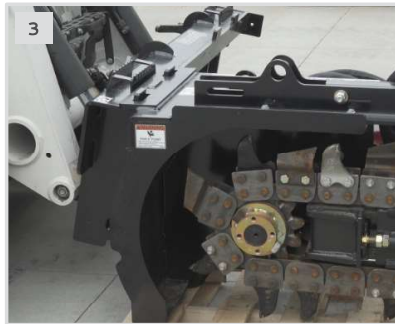

2. ANTI-BACK FLEX CHAIN FOR TOUGH DIGGING CONDITIONS

3. MANUAL SIDE-SHIFT & REMOVABLE AUGER FOR TRENCHING CLOSE TO STRUCTURES



4. GREASABLE IDLER BEARING AT TRENCHER BOOM END FOR LONGEVITY

5. STANDARD CRUMBER KEEPS TRENCH BOTTOM CLEAN & SMOOTH

6. BI-DIRECTIONAL CHAIN ROTATION TO EXPEL OBJECTS

MODEL	TCH36	TCH48	TCH60
Dig Depth (in.)	36.0	48.0	60.0
Overall Width (in.)		58.5	
Overall Height (in.)		26.5	
Overall Length (in.)	77.6	91.6	103.6
Side Shift Travel From Center (in.)		33.0	
Auger Diameter (in.)		17.3	
Spoil Auger Discharge Reach (in.)		20.3	
Optimal Trenching Angle (degrees)		60	
Recommended Flow Rate (GPM)		15-25 Standard Flow Only	
Approximate Weight (lbs)	1040 ¹	1100 ¹	1160 ¹
Recommended Loader Capacity		Greater than 1500 lbs	

¹With 70/30 Combo chain.