

# V60 ANGLE SNOW BLADE



- Two-cylinder hydraulic design allows the blade to angle +/- 30°.
- Hydraulic crossover relief valve helps protect the attachment by absorbing shock by angling the entire blade if a curb or other object is struck.
- Trip edge containing four compression springs and hinge points.
- Side-to-side oscillation allows the cutting edge to follow the contour of the surface.
- 2" bore, 8 3/8" stroke cylinders featuring corrosion, dent and flake resistant NitroSteel® cylinder rods.
- Greasable 1 1/4" cylinder pins and 1 9/16" diameter pivot pin.
- Design allows 5 1/2" of total wear on the standard 5/8" x 8" reversible, replaceable bolt-on wear edge.

## Option: Poly Edge




Details on page 3.

## Option: Pin-on Wings



Details on page 3.

# V60 ANGLE SNOW BLADE SPECS

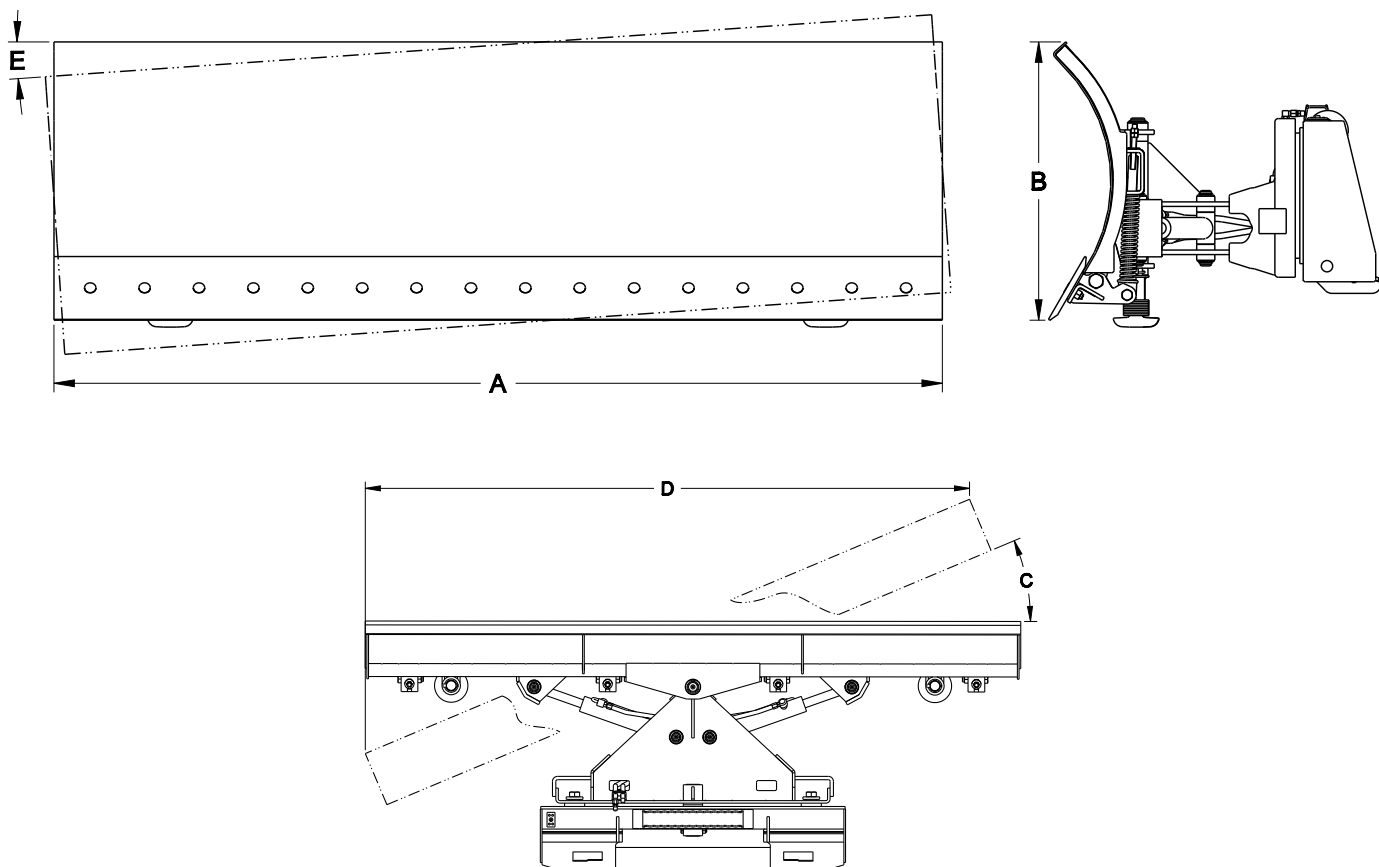

MODEL	SBS72	SBS84	SBS96	SBS108	SBS120
(A) Overall Blade Width (Inches)	74.0	86.0	98.0	110.0	120.0
(B) Blade Height (Inches)	31.0				
(C) Blade Angle (Degrees)	+/- 30				
(D) Width at Full Angle (Inches)	64.0	74.0	84.0	95.0	104.0
Moldboard Thickness (Inches)	0.19				
Cutting Edge (Inches)	5/8 x 8 Bolt-on				
(E) Blade Oscillation (Degrees)	+/- 4				
Approximate Weight (Pounds)	990	1050	1110	1170	1230
Recommended Loader Capacity	Greater than 1500 pounds				

- 1-9/16" diameter pivot pin.
- 2" bore, 8-3/8" stroke cylinders with 1-1/4" NitroSteel® cylinder rods and 1-1/4" cylinder pins.
- Includes steel cutting edge, cylinders, fittings, hoses from blade to loader and couplers.
- Replacement edge kits available.