


V60 SKELETON ROCK BUCKET



- Raised ridge in center of tines (rock dam) and notch near tips secure rocks while digging.
- Every tine is constructed of one piece of ½" Grade 80 steel, from tip to top cross member, to add rigidity.
- Fully gusseted tine tips for added strength.
- Additional uses include digging roots from thick brush and efficient back-dragging.

V60 SKELETON ROCK BUCKET SPECS

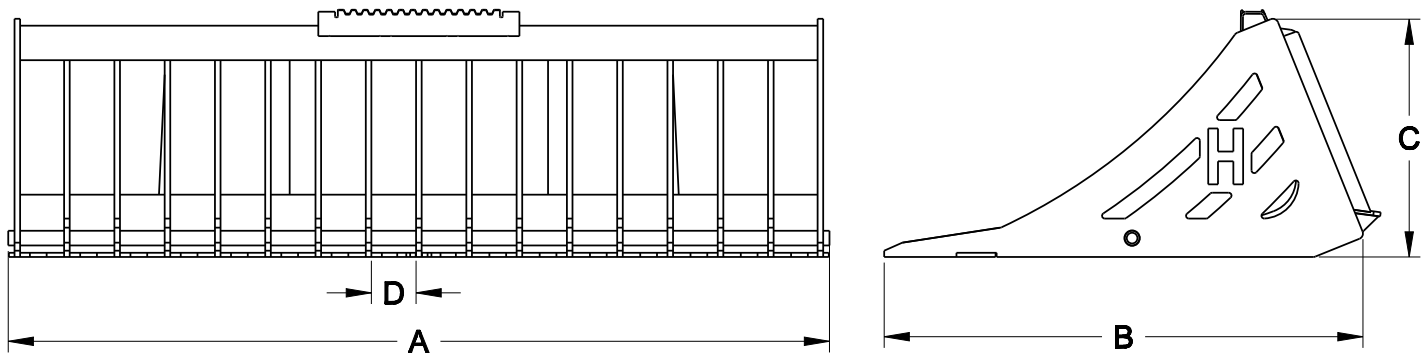

MODEL	HSRV72	HSRV78	HSRV84	HSRV90
(A) Overall Bucket Width (Inches)	73.5	79.5	85.5	91.5
(B) Bucket Depth (Inches)	42.9			
(C) Bucket Height (Inches)	21.5			
Number of Tines (With Sides)	17	18	20	21
(D) Space Between Tines (Inches)	4.0	4.1	3.9	4.0
Bucket Tine Thickness (Inches)	0.5*			
Approximate Weight (Pounds)	675	710	765	800
Recommended Loader Capacity (Pounds)	Greater than 1800			

*Tine material is Grade 80 plate (80,000 psi minimum yield strength).