



# V60 SNOW/LIGHT MATERIAL BUCKET

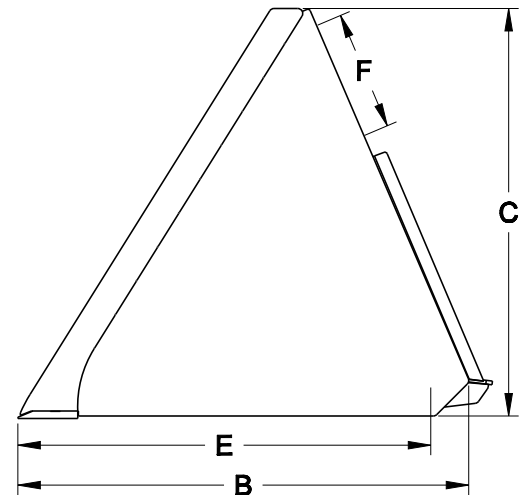


- Heavy-duty,  $\frac{3}{4}$ " thick shell and sides, and  $\frac{3}{8}$ " thick side edges and gussets.
- Two  $\frac{1}{2}$ " thick vertical braces inside bucket make it more rigid.
- $\frac{3}{4}$ " x 6" weld-on cutting edge with holes to accept optional edges (see page 3).

# V60 SNOW/LIGHT MATERIAL BUCKET SPECS

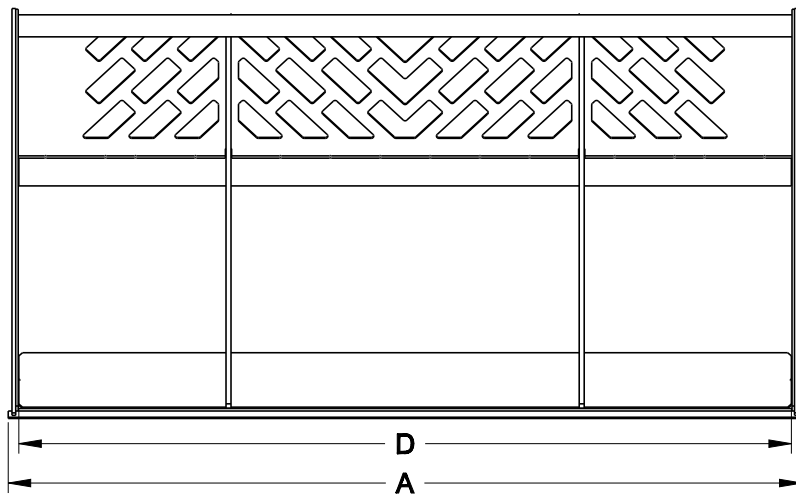


MODEL	SBHV78	SBHV84	SBHV96	SBHV101
(A) Overall Bucket Width (Inches)	79.5	85.5	97.5	101.5
(B) Bucket Depth (Inches)	45.5			
(C) Bucket Height (Inches)	40.5			
(D) Inside Bucket Width (Inches)	77.3	83.3	95.3	99.3
(E) Inside Bucket Depth (Inches)	43.5			
(F) Window Height (Inches)	12.3			
Struck Capacity (Cubic Feet)	40.1	43.2	49.4	52.2
Heaped Capacity (Cubic Feet)	48.1	51.8	59.3	62.6
Bucket Back Angle (Degrees)	66			
Shell Thickness (Inches)	0.25			
Side Plate Thickness (Inches)	0.25			
Structural Wear Bars Under Bucket (1/2" x 4")	5	5	5	5
Approximate Weight (Pounds)	950	1030	1180	1250
Recommended Loader Capacity	Greater than 2400 pounds			

# V60 SNOW/LIGHT MATERIAL BUCKET EDGE OPTIONS

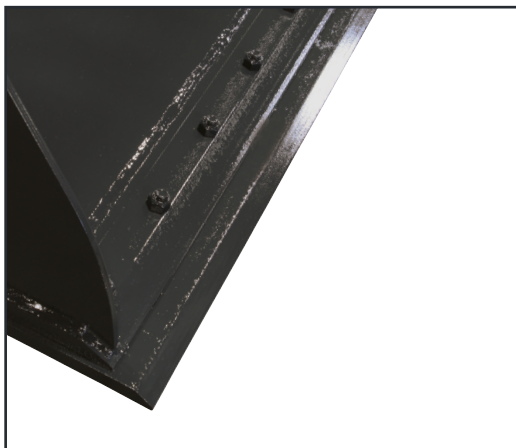

## STANDARD BOLT-ON EDGE

- Extends life of bucket edge.
- Reversible 5/8"x8" bolt-on wear edge with 5/8" holes spaced 6" on center.
- Available on all Virnig Buckets except skeleton style.

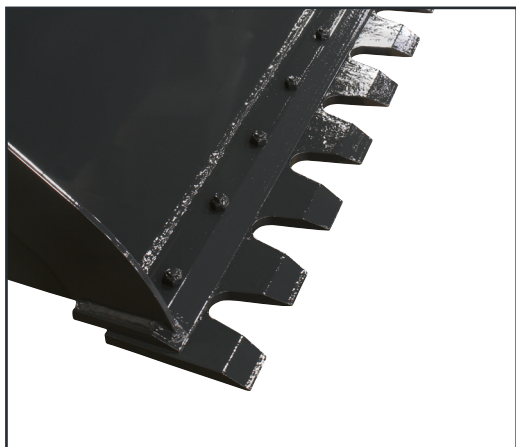

## SERRATED BOLT-ON EDGE

- Excellent alternative to toothbar for chiseling and breaking up compacted soil.
- Single bevel, 3/4"x8", serrated bolt-on edge with 5/8" holes spaced 6" on center.
- Available on all Virnig Buckets except skeleton style.