


Bolt-On Grapple



Features

- ❖ Makes turning a bucket into a grapple simple. No welding or cutting required.
- ❖ Telescoping mount system fits various width and style buckets.
- ❖ Corrosion, dent and flake resistant NitroSteel® cylinder rod made in the USA.
- ❖ One-cylinder design with machine specific hydraulic package.

Bolt-On Grapple Specifications

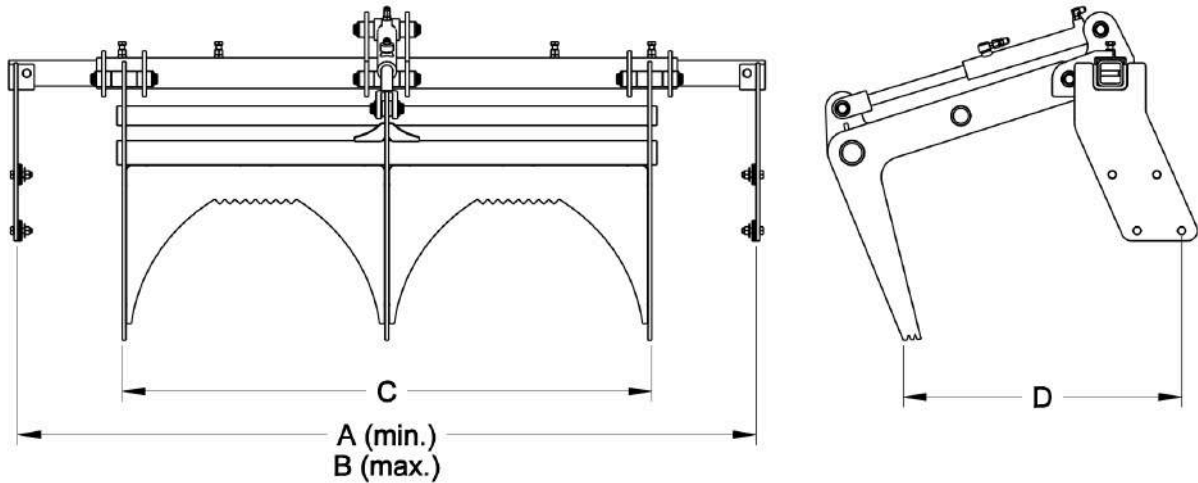

MODEL	BOGV6084
Number of Cylinders	1
(A) Minimum Bucket Width (Inches)	60.0 ¹
(B) Maximum Bucket Width (Inches)	84.0 ¹
(C) Grapple Jaw Width (Inches)	52.0
(D) Grapple Depth (Inches)	29.0
Approximate Jaw Opening (Inches)	42.0 ²
Approximate Weight (Pounds)	275
Recommended Loader Capacity (Pounds)	Less than 1800

¹ Mount Tubes Telescope to Fit Various Width Buckets

² Jaw Opening Varies with Type of Bucket and Installation

Additional Info

- 1" diameter hinge pins.
- Grade 50 reinforced plate grapple jaw tines (50,000 PSI minimum yield strength).
- 1 1/2" bore, 8" stroke cylinder with 1 1/8" NitroSteel® cylinder rod and 1" cylinder pins.
- Hoses from grapple to loader and couplers included.

Specifications and designs are subject to change without notice.



Virnig Manufacturing Inc.
800-648-2408
attachments@virnigmfg.com
www.virnigmfg.com