

Utility Bucket (Standard)



Features

- ❖ General-purpose bucket suited for dense and bulk materials.
- ❖ 3/4" x 6" weld-on edge with holes for optional edges.

OPTION: Standard Bolt-on Edge





Reversible 5/8" x 8" double-bevel, bolt-on wear edge with 5/8" holes spaced 6" on center.

OPTION: Serrated Bolt-on Edge



Reversible 3/4" x 8" single-bevel, serrated bolt-on wear edge with 5/8" holes spaced 6" on center.

Utility Bucket (Standard) Specifications

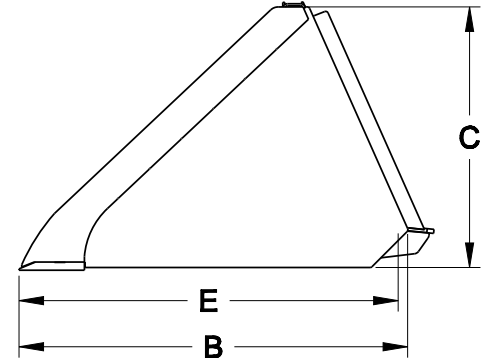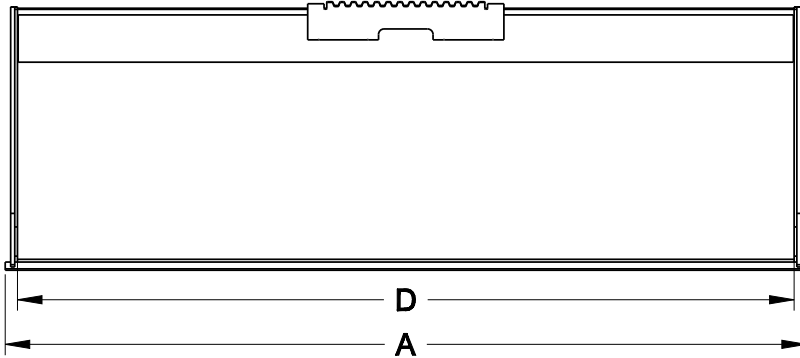

MODELS	UHV60	UHV66	UHV72	UHV78	UHV84
(A) Overall Bucket Width (Inches)	61.5	67.5	73.5	79.5	85.5
(B) Bucket Depth (Inches)	35.6				
(C) Bucket Height (Inches)	24.0				
(D) Inside Bucket Width (Inches)	59.3	65.3	71.3	77.3	83.3
(E) Inside Bucket Depth (Inches)	34.5				
Struck Capacity (Cubic Feet)	14.4	16.0	17.6	19.2	20.8
Heaped Capacity (Cubic Feet)	17.3	19.2	21.1	23.0	24.9
Shell Thickness (Inches)	0.19	0.19	0.25		
Side Plate Thickness (Inches)	0.25				
Structural Wear Bars Under Bucket (1/2" x 4")	2	2	2	3	3
Approximate Weight (Pounds)	500	530	630	680	715
Recommended Loader Capacity (Pounds)	Less than 2400				

Specifications and designs are subject to change without notice.




Virnig Manufacturing Inc.
800-648-2408
attachments@virnigmfg.com
www.virnigmfg.com

Utility Bucket (Standard) Edge Options



STANDARD BOLT-ON EDGE

- ✓ Extends life of bucket edge.
- ✓ Reversible 5/8" bolt-on wear edge with 5/8" holes spaced 6" on center.
- ✓ Available on all Virnig Buckets except skeleton style.

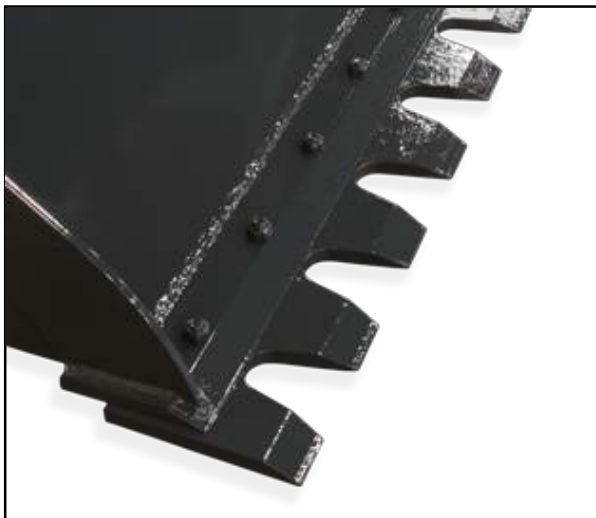

SERRATED BOLT-ON EDGE

- ✓ Excellent alternative to toothbar for chiseling and breaking up compacted soil.
- ✓ Single bevel, 3/4" x 8", serrated bolt-on edge with 5/8" holes spaced 6" on center.
- ✓ Available on all Virnig Buckets except skeleton style.