


# POWER RAKE

Available Widths 72", 84" & 90"

Prep, level and condition soil with more torque and less maintenance than chain drive.

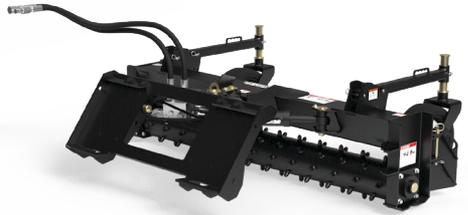

Char-Lynn

*Shown with optional Hydraulic Angle*

**15-25 GPM**  
TWO MOTOR  
OPTIONS


DIRECT DRIVE  
**EATON® MOTOR**

**MANUAL & HYDRAULIC**  
ANGLE AVAILABLE

GREATER THAN  
**1500 LB**  
LOADER OPERATING CAPACITY

Order Now for completion on May 1st.

Need a Power Rake sooner? Our previous Power Rake (PWR) model is still available until May.\*

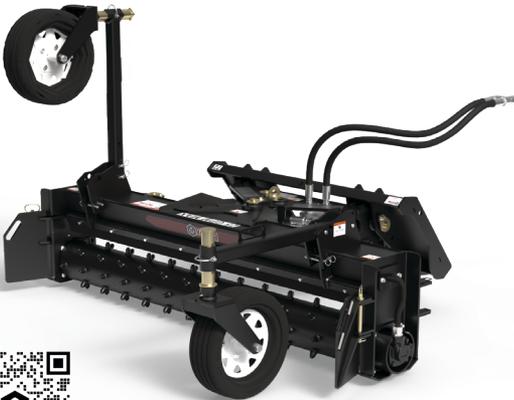

**OPTION: HYDRAULIC ANGLE**

Angle the rake 25° left or right from inside the cab.



\*New power rake (PRK) model completion date subject to change without notice. Current power rake (PWR) model availability subject to change without notice. Both are first come first served.



1. 22" FLOATING DESIGN AUTOMATICALLY FOLLOWS TERRAIN WHILE PROVIDING FULL DOWN PRESSURE
2. FLAT FREE TIRES WITH QUICK HEIGHT ADJUSTMENT IN 1/2" INCREMENTS. WHEEL ARMS FLIP UP FOR STORAGE.
3. RECESSED & GUARDED DIRECT DRIVE MOTOR PROVIDES BI-DIRECTIONAL DRUM ROTATION
4. CHOOSE MOTOR OPTION: HIGH TORQUE FOR TOUGH SOIL OR HIGH SPEED (~60% FASTER) FOR PRODUCTIVITY IN LIGHTER CONDITIONS - SAME PROFESSIONAL FINISH
5. ADJUSTABLE BARRIER TO CONTROL MATERIAL FLOW & FINISH QUALITY
6. REMOVABLE SIDE PLATES MOUNT TO FRONT OR BACK FOR MATERIAL CONTAINMENT
7. ROUND CARBIDE TEETH DELIVER A SUPERIOR SEEDBED WITH GREATER DURABILITY & CONSISTENCY THAN POINTED TEETH
8. ANGLE THE RAKE 21° LEFT OR RIGHT WITH MANUAL OR HYDRAULIC ANGLE

MODEL	PRK72	PRK84	PRK90
Working Width, Straight (in.)	72.0	84.0	90.0
Working Width, Full Angle (in.)	66.8	77.9	83.4
Overall Width (in.)	81.0	93.0	99.0
Overall Height (in.)		26.0	
Overall Depth (in.)		60.0	
Drum Diameter (in.)		7.5	
Teeth (qty.)	101	118	127
Float Link Angle (degrees)		22	
Rake Angle (degrees)		21	
Recommended Flow Rate (GPM)		15-25	
Approximate Weight (lbs)	915	960	985
Recommended Loader Capacity (lbs)		Greater than 1500	