

X30 MINI EXCAVATOR ROTARY BRUSH CUTTER

Available widths 42", 48" & 60"

Clear small trees, brush and access hard to reach areas for a maintained finish.



60" Model




Do not operate cutter without a shatterproof cab on excavator.

<p>4.0" OR 6.0" CUT CAPACITY (MODEL DEPENDENT)</p>	<p>42"-60" THREE CUT WIDTHS</p>	<p>42" MODEL 15-28 GPM TWO MOTOR OPTIONS</p>	<p>48" MODEL 15-38 GPM FOUR MOTOR OPTIONS</p>	<p>60" MODEL 20-38 GPM THREE MOTOR OPTIONS</p>
---	--	---	--	---


DETAIL UNDER DECK
W/ OPTIONAL SIDE CURTAIN



42" & 48"

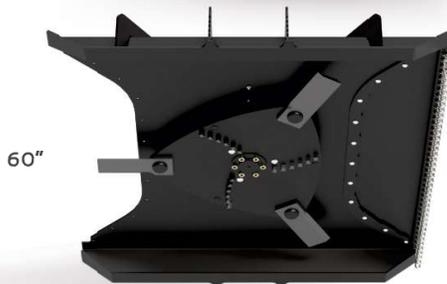

60"



**OPTION:
SIDE CURTAIN(S)**
Choose one or two bolt-on side curtains to reduce debris thrown.



**OPTION:
CARBIDE TEETH**
Shred material for a better finish.



**OPTION: BOLT-ON
HANGER BRACKET**
• Many options available!
• Note: Hanger bracket is not included.



- 1. NO CASE DRAIN REQUIRED. DIRECT DRIVE EATON® MOTOR WITH RELIEF VALVE PROTECTION
- 2. 42" & 48" MODELS FEATURE UNIQUE BOLT-ON FRONT DECK. REMOVE FOR 270° BLADE ENGAGEMENT
- 3. BOLT-ON MOUNTING INTERFACE FOR QUICKLY CHANGING HANGER BRACKETS

- 4. ROUNDED FLYWHEEL WITH 3 DOUBLE-SIDED BLADES BOUNCES OFF STUMPS
- 5. SERRATED REAR DECK FOR BACK DRAGGING BRUSH & GRUBBING STUMPS
- 6. STANDARD MOTOR GUARD & SPINDLE GUARD
- 7. VARIOUS HANGER BRACKETS AVAILABLE TO FIT MOST EXCAVATOR BRANDS

	MODEL	XBC42	XBC48	XBC60
Cut Width (in.)		42.0	48.0	60.0
Overall Width Without Sides / With Sides (in.)		38.8 / 52.0	44.9 / 58.0	71.5 / 72.7
Height: Overall / Deck (in.)		20.5 / 5.8	21.5 / 5.8	23.2 / 6.1
Overall Depth (in.)		52.5	58.5	75.5
Minimum Cut Height w/ Bolt-on Front (in.)			2.0	2.3
Cutting Capacity, Diameter (in.)			4.0	6.0
Deck Thickness: Top / Side (in.)			0.25	
Recommended Flow Rate (GPM)		15-25 / 22-28	15-22 / 22-28 28-35 / 35-38	20-28 / 28-35 / 35-38
Max Operating Pressure (PSI)		3500	3500 / 4100 ¹	3500 / 4100 ¹
Approximate Weight: No Sides / Both Sides (lbs)		700 ² / 830 ²	815 ² / 965 ²	1050 ² / 1250 ²
[Optional] Carbide Teeth: Weight (lbs) / Qty		8 / 12	12 / 18	12 / 18
Approximate Operating Weight		Cutter + Hanger + Options ³		
Mini-Ex's Lowest Lift Capacity Over Side at Max Reach		Must Exceed Cutter Operating Weight ⁴		
Recommended Mini Excavator Weight (lbs)		8900-26000	11000-26000	15000-26000

¹4100 PSI max pressure only applies to 28-35 and 35-38 GPM flow ranges.

²Weight doesn't include hanger bracket or tooth option.

³Add weight of cutter, hanger and options to determine operating weight. Hangers typically weigh between 80 and 150 pounds.

⁴Excavator's lowest lift capacity of any blade and boom orientation must exceed cutter operating weight. Excavator lift capacities vary based on arm length, counterweight and open vs closed cab. Ensure the excavator configuration in the manufacturer's specs matches your machine's exact setup.