

Stump Bucket





Features

- ❖ A versatile attachment ideal for digging stumps and rocks, trenching, and breaking up compacted soil (see page 3).
- ❖ Tall sides provide capacity, while compact depth provides leverage to pry under stumps and rocks.
- ❖ Three flush mount shanks, with replaceable Series 23 cast teeth, welded to a 3/4" x 6" weld-on wear edge.
- ❖ Bucket is reinforced on each side with three large gusset plates.



Stump Bucket Specifications

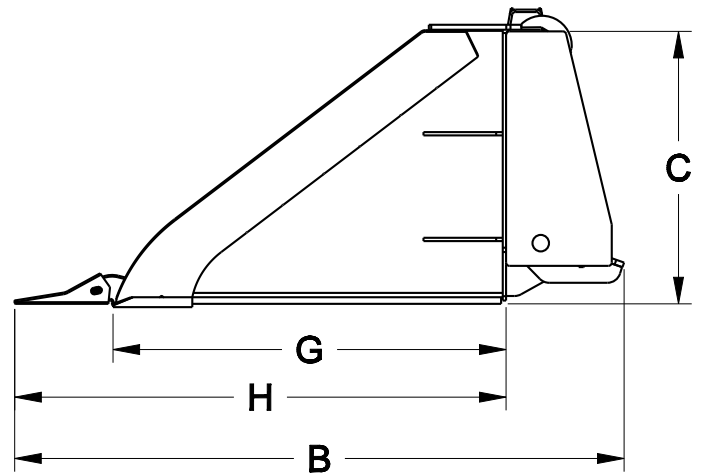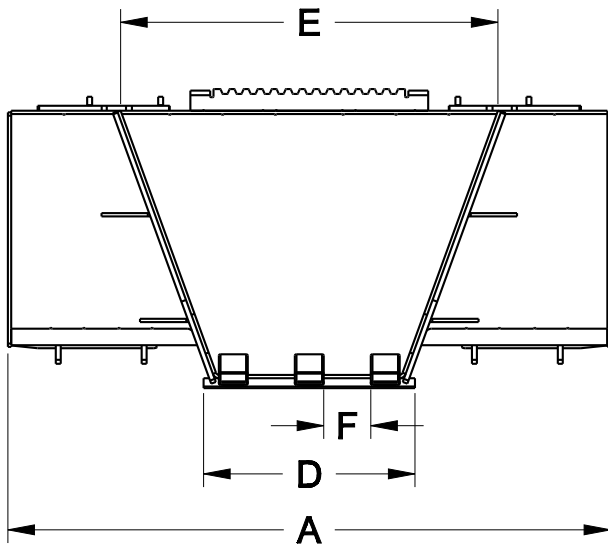

MODEL	STMP
(A) Overall Width (Inches)	45.6
(B) Overall Depth (Inches)	46.3
(C) Overall Height (Inches)	20.7
(D) Shovel Width, Bottom (Inches)	16.0
(E) Shovel Width, Top (Inches)	23.8
(F) Tooth Space, Between Teeth (Inches)	3.3
(G) Shovel Depth (Inches)	29.6
(H) Shovel Depth, With Teeth (Inches)	37.3
Approximate Weight (Pounds)	375
Recommended Loader Capacity (Pounds)	> 1500

Specifications and designs are subject to change without notice.



Virnig Manufacturing Inc.
800-648-2408
attachments@virnigmfg.com
www.virnigmfg.com

Stump Bucket Action Pictures



Specifications and designs are
subject to change without notice.



Virnig Manufacturing Inc.
800-648-2408
attachments@virnigmfg.com
www.virnigmfg.com