



# Snow Removal


For skid-steer loaders, utility loaders, wheel loaders, & backhoe loaders

Whether you push, pull or blow snow, there's an FFC snow removal attachment that will get the job done right. The FFC Snow Push quickly removes even the heaviest snow without leaving windrows, and with the optional Pull Back Kit, the Snow Push gets in next to fences and buildings to pull snow away cleanly. The FFC Snow Blower throws snow as far as 45 feet, features a poly-lined chute and deflector for faster adjustments, and never requires a case drain. The FFC Snow Bucket provides yet another exceptional tool for your snow removal needs. And with 16 Snow Blade models to choose from, there's an FFC Snow Blade that's ideal for your machine and the job. The "New" Trip Edge Blade is also available with a floating tilt which allows for cleaner snow removal across uneven roads.

1 year warranty on structure

6 month warranty on hydraulics

- Model 11006 Shown

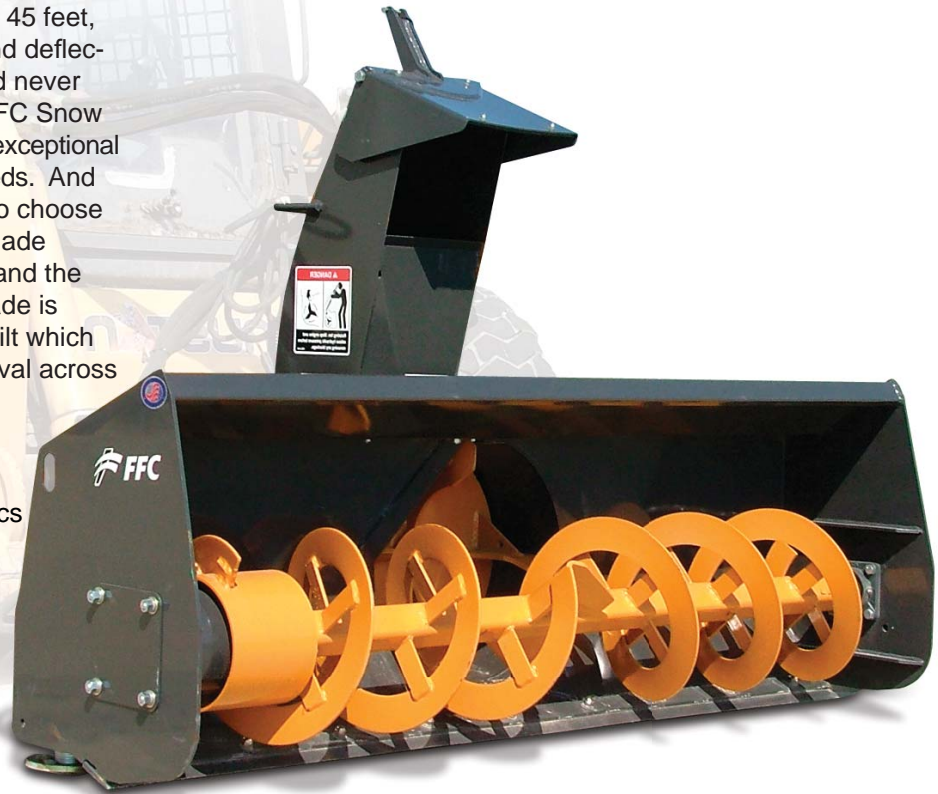

PALADIN LIGHT CONSTRUCTION



# Snow Push

## SNOW PUSH (FOR SSL, COMPACT UTILITY LOADERS, SMALL WHEEL LOADERS AND BACKHOE LOADERS)

### SNOW PUSH FEATURES:

- Moves large volumes of snow efficiently. Also ideal for waste water, manure, feed lot and food cleanup
- All 117 series models are low profile, lighter weight, and for skid steers, feature height of 28.62" and depth of 49.3" and all 3600 series models feature 39.5" in height and 49.3" depth
- Optional Pull Back Kit draws back snow from buildings, fences and confined areas - Available for 3600 series, 117 series, and 10709 model numbers only
- Optional Bucket Lip Mount available for 10', 12' and 14' models - Available for 3600 series only

### 4x4 SNOW PUSH FEATURES:

**(Fits Wheel Loaders and Backhoe Loaders Only)**

- Moves large volumes of snow efficiently

### 117 SERIES SNOW PUSH SPECIFICATIONS (LOW PROFILE, LIGHT WEIGHT):

Model #	Width	Path Width	A Height	B Depth	Overall Width	Weight (Approx)
11773	6'	72"	28.62"	49.3"	78"	751 lbs
11785	7'	84"	28.62"	49.3"	90"	822 lbs
11795	8'	96"	28.62"	49.3"	102"	893 lbs
11721	10'	120"	28.62"	49.3"	126"	1,035 lbs
lift capacities operating weight						<9,500 lbs <11,000 lbs

### 3600 SERIES SNOW PUSH SPECIFICATIONS:

Model #	Width	Path Width	A Height	B Depth	Overall Width	Weight (Approx)
LAF3618	8'	96"	39.5"	49.3"	102"	1,205 lbs
LAF3617	10'	120"	39.5"	49.3"	126"	1,425 lbs
LAF3652	12'	144"	39.5"	49.3"	150"	1,948 lbs
LAF3654	14'	168"	39.5"	49.3"	172"	2,118 lbs
lift capacities operating weight						<10,000 lbs <12,000 lbs

### 4X4 SNOW PUSH SPECIFICATIONS:


Model #	OD Width	A Height	B Depth	Push Capacity	Weight (Approx)
11016	16'	47"	72"	21 yd <sup>3</sup>	2,700 lbs
lift capacities operating weight					<11,000 lbs <32,000 lbs

### COMPACT TRACTOR SNOW PUSH SPECIFICATIONS:

Model #	Width	Cutting Width	A Height	B Depth	Overall Width	Weight (Approx)
10707-60-0822	5'	61.75"	30.75"	34"	62.25"	403 lbs
10707-72-0822	6'	73.75"	30.75"	34"	74.25"	440 lbs
10707-84-0822	7'	85.75"	30.75"	34"	86.25"	477 lbs
10707-96-0822	8'	97.75"	30.75"	34"	98.25"	514 lbs
lift capacity operating weight						<2,000 lbs <4,000 lbs

### SKID STEER TRIP EDGE MODELS SNOW PUSH SPECIFICATIONS

Model #	Width	Cutting Width	A Height	B Depth	Overall Width	Weight (Approx)
10709-78-0022	6.5'	80"	39.75"	41.50"	80.38"	860 lbs
10709-96-0022	8'	98"	39.75"	41.50"	98.38"	900 lbs
10709-08-0022	9'	110"	39.75"	41.50"	110.38"	943 lbs
10709-20-0022	10'	119.5"	39.75"	41.50"	110.88"	980 lbs
lift capacity operating weight						<9,500 lbs <11,000 lbs

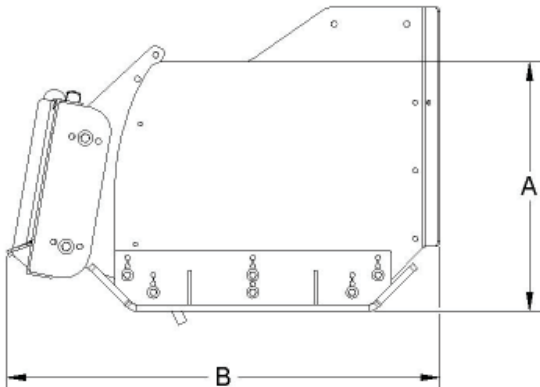

PH: (800) 747-2132  
FX: (815) 824-2620

100 East Lee Road  
Lee, IL 60530  
United States of America

www.paladinbrands.com  
F-Snow 0710-2



PALADIN LIGHT CONSTRUCTION

# Snow Blade

## 1400 SERIES

(FOR SKID-STEERS AND COMPACT UTILITY LOADERS)

**FEATURES:**

- Available in either hydraulic or manual angle. Angles 30 degrees in either direction
- Seven gauge steel blade

## 5700 SERIES

(FOR SSL, COMPACT UTILITY LOADERS, BACKHOE LOADERS)

**FEATURES:**

- Hydraulically angles 30 degrees in either direction
- Reinforced ten gauge steel blade

## 115 SERIES

(FOR LARGE SSL, COMPACT UTILITY LOADERS, SMALL WHEEL LOADERS AND BACKHOE LOADERS)

**FEATURES:**


- Hydraulically angles 35 degrees in either direction
- Ten gauge steel blade
- Optional top flap which reduces snow spillage

## 116 SERIES - TRIP EDGE BLADE

(FOR SKID-STEERS)

**FEATURES:**

- Cutting edge trip system allows operator to glide over manholes & curb obstructions without losing gathered material
- Hydraulically angles 30 degrees in either direction
- Adjustable skid shoes
- Reversible high carbon steel bolt-on edge
- 6 degree floating tilt allows for cleaner snow removal across uneven roads

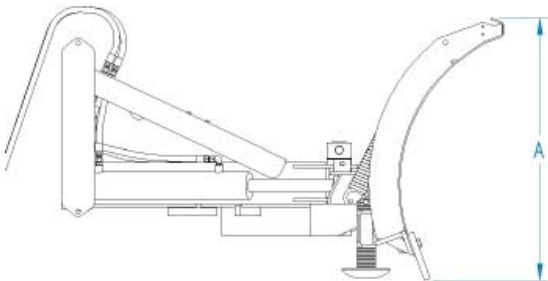

### SNOW BLADE SPECIFICATIONS:

LAF #	Width OD	A Height OD	Angled Cut Width	Weight (Approx)
<b>1400 Series*</b>				lift capacity <5,000 lbs operating weight <8,000 lbs
1462	60"	23"	52"	510 lbs
1474	72"	23"	62"	595 lbs
1482	84"	23"	73"	635 lbs
1498	96"	23"	83"	650 lbs
<b>5700 Series*</b>				lift capacity <9,500 lbs operating weight <11,000 lbs
5784	84"	32"	73"	710 lbs
5796	96"	32"	83"	780 lbs
5708	108"	32"	93"	850 lbs
5720	120"	32"	104"	925 lbs
5732	132"	32"	114"	995 lbs
5744	144"	32"	125"	1,065 lbs
<b>115 Series*</b>				lift capacity <11,000 lbs operating weight <20,000 lbs
11584	84"	32"	69"	1,135 lbs
11596	96"	32"	79"	1,172 lbs
11508	108"	32"	88"	1,240 lbs
11520	120"	32"	98"	1,308 lbs
11532	132"	32"	108"	1,376 lbs
11544	144"	32"	118"	1,446 lbs
<b>116 Series</b>				lift capacity <5,000 lbs operating weight <8,000 lbs
11672	72"	32"	62"	670 lbs
11690	90"	32"	78"	816 lbs
11602	102"	32"	88"	975 lbs
11619	119"	32"	103"	1040 lbs

- \*Models 1400, 5700 and 115 are all installed with:
- Replaceable wear edge (optional rubber edge)
  - Adjustable skid shoes
  - Spring-loaded trip mechanism

The 1400 Series Snow Blade is for all skid-steer and utility loader models up to 80 hp. Locking bolts (part# RHW8063) are included for light dirt moving - skid steers only.

**IMPORTANT:** All replacement hydraulic hoses and fittings must have a minimum rated working pressure of 4000 psi. Hoses and hydraulic couplers from the attachment to the loader are included for skid-steer only.

PH: (800) 747-2132  
FX: (815) 824-2620

100 East Lee Road  
Lee, IL 60530  
United States of America

www.paladinbrands.com  
F-Snow 0710-2



PALADIN LIGHT CONSTRUCTION

# Snow Blower

## SNOW BLOWER (FOR SKID-STEER LOADERS)

### FEATURES:

- Two-stage hydraulic blower throws snow up to 45ft
- Electronic or electro/hydraulic poly-lined chute and deflector
- Reinforced wrapper and adjustable skid shoes
- No case drains required for high-flow models
- Provides excellent visibility
- Replaceable wear-resistant steel tapered wear edge
- High-volume 25" or 36" shroud opening


\*Carrier Specifications for LAF6748:

Lift Capacity <5,000 lbs & Operating Weight <8,000 lbs

LAF6799 - High-Flow Snow Blower Truck Chute Kit  
(must have "G" or "H" motor configuration)

### Motor Suffixes & Specifications

When ordering, verify hydraulic flow and pressure of skid-steer. Failure to supply proper flow and pressure could result in motor failure or poor performance.



Model	Cutting Width	A Depth	B Height	C Cutting Height	Weight (Approx)
<b>Standard Flow</b>					
6748*	48"	38"	57"	25"	490 lbs
11005	60"	38"	57"	25"	650 lbs
11006	72"	38"	57"	25"	685 lbs
11008	78"	38"	57"	25"	703 lbs
11007	84"	38"	57"	25"	720 lbs
<b>High Flow</b>					
6774	72"	43"	74"	36"	1,160 lbs
11009	78"	43"	74"	36"	1,200 lbs
6786	84"	43"	74"	36"	1,240 lbs
6798	96"	43"	74"	36"	1,320 lbs

Motor Suffixes	Motor	GPM Range	PSI Range	Hose ID	Weight
<b>Standard Flow</b>					
A	single	8-13	1800-2500	1/2"	-
C	single	12-25	2000-3000	1/2"	-
D	single	14-21	2000-3000	1/2"	-
E	single	18-27	2000-3000	5/8"	10 lbs
<b>High Flow</b>					
F	single	22-34	2500-3500	3/4"	-
G	dual	19-34	2500-3500	3/4"	-
H	dual	30-42	2500-3500	3/4"	10 lbs

### Carrier Specifications

lift capacity <9,500 lbs  
operating weight <11,000 lbs

# Snow Bucket

## SNOW BUCKET (FOR SSL, COMPACT UTILITY LOADERS, SMALL WHEEL LOADERS AND BACKHOE LOADERS)


### SNOW BUCKET FEATURES:

- Moves large volumes of snow or other loose materials efficiently
- Cut out back plate for better visibility
- Quickly attaches to all skid-steer, backhoe, utility loader and small wheel loader brands
- Optional Bolt-On Edge available

Model	Width ID	Height A	Depth B	Capacity Struck	Capacity Heaped	Weight (Approx)
11184 <sup>1</sup>	84"	29.9"	42.0"	1.14 yd <sup>3</sup>	1.47 yd <sup>3</sup>	733 lbs
11196 <sup>1</sup>	96"	29.9"	42.0"	1.70 yd <sup>3</sup>	1.31 yd <sup>3</sup>	795 lbs
11197 <sup>2</sup>	96"	37.6"	46.2"	2.36 yd <sup>3</sup>	1.83 yd <sup>3</sup>	999 lbs
11108 <sup>2</sup>	108"	37.6"	46.2"	2.67 yd <sup>3</sup>	2.07 yd <sup>3</sup>	1,078 lbs

<sup>1</sup>Medium-Duty Bucket

<sup>2</sup>Heavy-Duty Bucket



(Lead Edge C: 29.7")

### Med. Duty Carrier Specifications:

lift capacities <5,000 lbs  
operating weight <8,000 lbs

### Heavy Duty Carrier Specifications:

lift capacities <9,500 lbs  
operating weight <11,000 lbs

PH: (800) 747-2132

FX: (815) 824-2620

100 East Lee Road  
Lee, IL 60530  
United States of America

www.paladinbrands.com

F-Snow 0710-2

**BRADCO**

**FFC**

**HARLEY**

**MAJOR**

**MCMILLEN**

**SWEEPSTER**

PALADIN LIGHT CONSTRUCTION